

## DUXFORD BULKHEAD 4000K IP65 15W STANDARD

NET-33-06-40



### Features & Benefits

- Single colour temperature 4000K
- IP65 rated housing
- Shatterproof all-polycarbonate diffuser
- Raised mounting plate
- 3 rear entry positions
- Suitable for BESA Box installation

### Key Data

Power	15W
Luminous Flux	1550lm
Colour Temperature	4000K
IP Rating	IP65
Dimensions	Ø325 x 110mm
Warranty	3 Years

### Compatible Accessories

NET-51-04-59	Photocell Kit for Outdoor Lighting
NET-33-06-06	Chrome Ring for Duxford Bulkheads
NET-33-06-08	Black Ring for Duxford Bulkheads

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	105lm/w
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	15W +/- 1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	1.13Kg
Manufacturer	NET LED Lighting
Fire Rating	V2
Housing Colour	White
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate

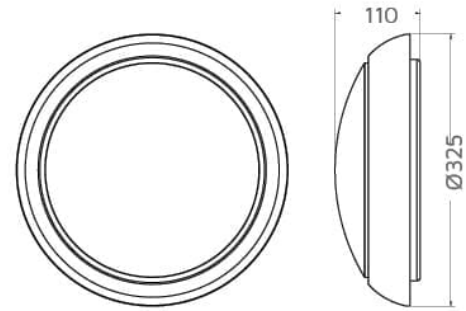

## Other Options

Description	
NET-33-06-40	Duxford Bulkhead 4000K IP65 15W Standard
NET-33-06-42	Duxford Bulkhead 4000K IP65 15W Emergency
NET-33-06-45	Duxford Bulkhead 4000K IP65 15W Self Test Emergency
NET-33-06-44	Duxford Bulkhead 4000K IP65 15W Microwave Sensor
NET-33-06-46	Duxford Bulkhead 4000K IP65 15W Microwave Sensor Emergency
NET-33-06-47	Duxford Bulkhead 4000K IP65 15W Microwave Sensor Self Test Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

## SHATTERPROOF POLYCARBONATE DIFFUSER

Prevents the fitting from breaking into multiple small pieces

## IP65 RATED HOUSING

Protect your bulkhead from water and dust

## LITHIUM ION BATTERY

Requires little maintenance and has a long lifespan

*Emergency options only*

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

*Photocell options only*

3K

4K

5.5K

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature  
3000K, 4000K or 5500K

## INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby  
Mode, 2-10m detection range  
and 5sec to 10min hold time

*Microwave Sensor options only*



## SUITABLE FOR BESA BOX INSTALLATION

Save time on site with  
pre-made cable entry points