


## DUXFORD BULKHEAD 4000K IP65 15W SELF TEST EMERGENCY

NET-33-06-45



### Features & Benefits

- Self Test Emergency function
- Single colour temperature 4000K
- IP65 rated housing
- Shatterproof all-polycarbonate diffuser
- Raised mounting plate
- 3 rear entry positions

### Key Data

|                           |              |
|---------------------------|--------------|
| <b>Power</b>              | 15W          |
| <b>Luminous Flux</b>      | 1550lm       |
| <b>Colour Temperature</b> | 4000K        |
| <b>IP Rating</b>          | IP65         |
| <b>Dimensions</b>         | Ø325 x 110mm |
| <b>Warranty</b>           | 3 Years      |

### Compatible Accessories

|              |                                    |
|--------------|------------------------------------|
| NET-51-04-59 | Photocell Kit for Outdoor Lighting |
| NET-33-06-06 | Chrome Ring for Duxford Bulkheads  |
| NET-33-06-08 | Black Ring for Duxford Bulkheads   |

#### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

|                            |                  |
|----------------------------|------------------|
| Input Voltage (AC)         | 220-240V         |
| Power Factor               | >0.9             |
| Luminaire Efficacy         | 105lm/w          |
| LED Manufacturer           | Jingrui          |
| LED Type                   | SMD 2835         |
| No. of LEDs                | 52               |
| Driver Manufacturer        | Tridonic         |
| Driver Output Voltage (DC) | 36-42V           |
| Total Circuit Power (W)    | 15W +/- 1.5W     |
| Electrical Class           | 1                |
| Colour Rendering           | >80 CRI          |
| Lamp Viewing Angle         | 115°             |
| Dimmable                   | No               |
| Operating Temp.            | 0°C to +45°C     |
| Lifespan LM80              | 35,000 Hours     |
| UGR Rating                 | More than 19     |
| Weight                     | 1.13Kg           |
| Manufacturer               | NET LED Lighting |
| Fire Rating                | V2               |
| Luminous Flux Factor       | 5%               |
| Self Test                  | Yes              |
| Housing Colour             | White            |
| Housing Material           | Polycarbonate    |
| Battery Pack               | Li-on 3.7V       |
| Diffuser Material          | Polycarbonate    |
| Emergency Kit              | 1 Year Warranty  |
| Emergency Operation        | >3H              |
| Emergency Pack             | Streamer         |

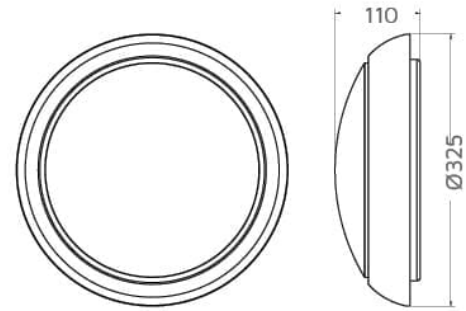

## Other Options

| Description  |  |
|--------------|--|
| NET-33-06-40 | Duxford Bulkhead 4000K IP65 15W Standard                             |
| NET-33-06-42 | Duxford Bulkhead 4000K IP65 15W Emergency                            |
| NET-33-06-45 | Duxford Bulkhead 4000K IP65 15W Self Test Emergency                  |
| NET-33-06-44 | Duxford Bulkhead 4000K IP65 15W Microwave Sensor                     |
| NET-33-06-46 | Duxford Bulkhead 4000K IP65 15W Microwave Sensor Emergency           |
| NET-33-06-47 | Duxford Bulkhead 4000K IP65 15W Microwave Sensor Self Test Emergency |

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

## SHATTERPROOF POLYCARBONATE DIFFUSER

Prevents the fitting from breaking into multiple small pieces

## IP65 RATED HOUSING

Protect your bulkhead from water and dust

## LITHIUM ION BATTERY

Requires little maintenance and has a long lifespan

*Emergency options only*

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

*Photocell options only*

3K

4K

5.5K

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

## INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby Mode, 2-10m detection range and 5sec to 10min hold time

*Microwave Sensor options only*



## SUITABLE FOR BESA BOX INSTALLATION

Save time on site with pre-made cable entry points