
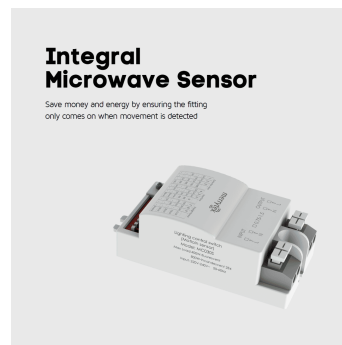


DUXFORD BULKHEAD 4000K IP65 15W MICROWAVE SENSOR EMERGENCY

NET-33-06-46



Features & Benefits

- Daylight threshold
- Dusk to dawn function
- Off during the day, 10% output at night and 100% with Motion Sensor
- Detection range from 2m to 10m
- Selectable 3000K, 4000K or 5500K colour temperature
- IP65 rated housing

Key Data

Power	15W
Luminous Flux	1550lm
Colour Temperature	4000K
IP Rating	IP65
Dimensions	Ø325 x 110mm
Warranty	3 Years

Compatible Accessories

NET-51-04-59	Photocell Kit for Outdoor Lighting
NET-33-06-06	Chrome Ring for Duxford Bulkheads
NET-33-06-08	Black Ring for Duxford Bulkheads

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	105lm/w
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	15W +/- 1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	1.13Kg
Manufacturer	NET LED Lighting
Fire Rating	V2
Luminous Flux Factor	5%
Self Test	No
Housing Colour	White
Housing Material	Polycarbonate
Battery Pack	Li-on 3.7V
Diffuser Material	Polycarbonate
Emergency Kit	1 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor IP Rating	IP20

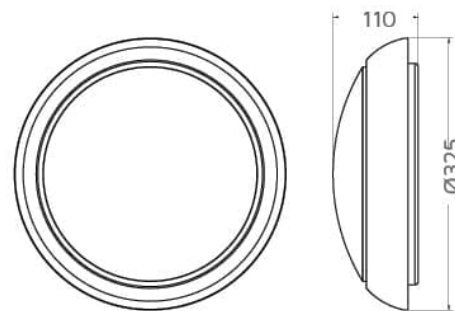

Other Options

Description		
NET-33-06-40	Yes	Duxford Bulkhead 4000K IP65 15W Standard
NET-33-06-42		Duxford Bulkhead 4000K IP65 15W Emergency
NET-33-06-45		Duxford Bulkhead 4000K IP65 15W Self Test Emergency
NET-33-06-44		Duxford Bulkhead 4000K IP65 15W Microwave Sensor
NET-33-06-46		Duxford Bulkhead 4000K IP65 15W Microwave Sensor Emergency
NET-33-06-47		Duxford Bulkhead 4000K IP65 15W Microwave Sensor Self Test Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

SHATTERPROOF POLYCARBONATE DIFFUSER

Prevents the fitting from breaking into multiple small pieces

IP65 RATED HOUSING

Protect your bulkhead from water and dust

LITHIUM ION BATTERY

Requires little maintenance and has a long lifespan

Emergency options only

PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

DUSK TO DAWN FUNCTION

Detects ambient light levels and adjusts the light accordingly

Photocell options only

3K

4K

5.5K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 5500K

INTEGRAL MICROWAVE SENSOR

Featuring a 0 or 10% Standby Mode, 2-10m detection range and 5sec to 10min hold time

Microwave Sensor options only



SUITABLE FOR BESA BOX INSTALLATION

Save time on site with pre-made cable entry points