
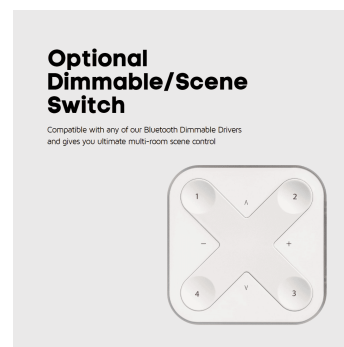


KINGSTON PANEL UGR<19 TUNABLE WHITE 600X600 2700K-6500K 30W TP(A)

NET-39-03-30

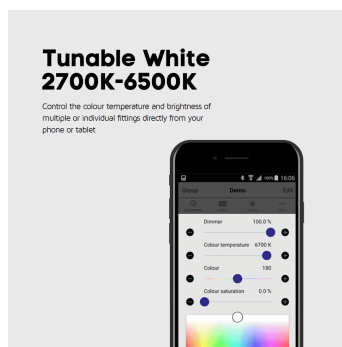

Features & Benefits

- Tunable colour temperature 2700K-6500K
- Controllable via app or Dimmable/Scene Switch
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- PMMA Light Guide path for even light distribution
- Dimmable flicker-free driver

Key Data

Power	30W
Luminous Flux	3300lm
Colour Temperature	Tunable 2700K-6500K
IP Rating	IP40 Front/IP20 Rear
Dimensions	595 x 595 x 10mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-60-43-80	Tridonic Triac Dimmable Driver 30W/45W (600x600mm and 1200x600mm Panels)
NET-46-16-02	Universal LED Panel Suspension Kit
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-60-16-80	Tridonic Bluetooth Multifunction Dimmable/Scene Switch
NET-39-03-39	Panel Surface Box 600x600mm

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.95
Luminaire Efficacy	122lm/W
LED Manufacturer	JUFEI
LED Type	SMD 4014
No. of LEDs	240
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	33-42V
Total Circuit Power (W)	30W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	95°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PC/PMMA
Weight	2.9Kg
Manufacturer	Lumlux Corp.
Frame Colour	White
Dimming Input Type	Bluetooth Tunable

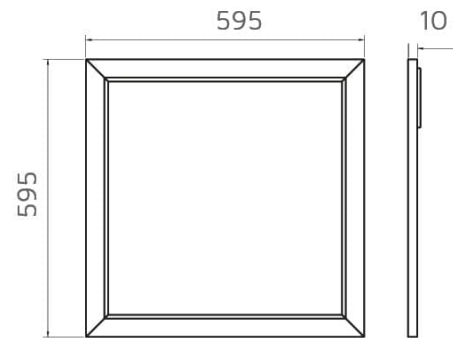

Other Options

Description	
NET-39-03-30	Kingston Panel UGR<19 Tunable White 600x600 2700K-6500K 30W TP(a) Standard
NET-39-03-31	Kingston Panel UGR<19 Tunable White 600x600 2700K-6500K 30W TP(a) Emergency
NET-39-03-59	Kingston Panel UGR<19 Tunable White 600x600 2700K-6500K 30W TP(a) Self Test Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

Control the colour temperature and brightness of your lighting directly from your phone or tablet.

Control multiple or individual fittings, or set the scene with pre-set colours and brightness levels.

Simply install our Tunable White Panel, pair it and you're good to go!

2700K - 6500K

Don't forget to download the free App!

Using your phone's camera, scan the QR code to download the Tridonic 4remote BT App!



TRIDONIC

