

KINGSTON PANEL UGR<19 TRI-COLOUR 600X600 27W TP(A) DIMMABLE SELF TEST

NET-39-03-54



Features & Benefits

- Self Test Emergency function
- Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- PMMA Light Guide path for even light distribution
- Selectable 3000K, 4000K or 5500K colour temperature

Key Data

Power	27W
Luminous Flux	2900lm/3300lm/3000lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP40 Front/IP20 Rear
Dimensions	595 x 595 x 10mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-46-16-02	Universal LED Panel Suspension Kit
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-39-16-03	Burgess Z Clips for Kingston Panels
NET-39-16-05	Burgess Adjustable Z Clips for Kingston Panels

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY


Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.95
Luminaire Efficacy	122lm/W
LED Manufacturer	JUFEI
LED Type	SMD 4014
No. of LEDs	240
Driver Manufacturer	Tridonic Excite Series
Driver Output Voltage (DC)	33-42V
Total Circuit Power (W)	27W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	95°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PC/PMMA
Weight	2.9Kg
Manufacturer	Lumlux Corp.
Frame Colour	White
Hours Maintained	3H
Luminous Flux Factor	10%
Self Test	Yes
Battery Pack	LiFePO4
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
Emergency Kit	3 Year Warranty

Other Options

Emergency Kit

Description		
NET-39-03-04	Foxlux	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Standard
NET-39-03-09		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Emergency
NET-39-03-10		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable one4all
NET-39-03-11		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable Emergency
NET-39-03-53		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Self Test Emergency
NET-39-03-54		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable Self Test Emergency
NET-39-03-55		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable DALI Emergency
NET-39-03-56		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth
NET-39-03-57		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth Emergency
NET-39-03-58		Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth Self Test Emergency

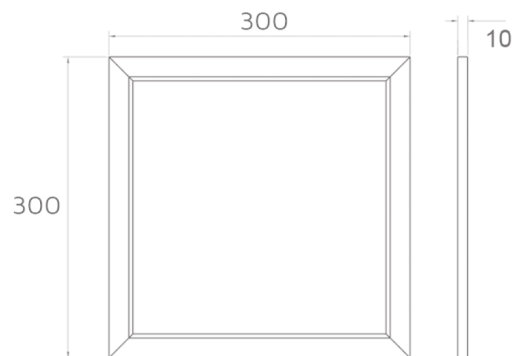

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and reduce electricity consumption

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only



3K

4K

5.5K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

EDGE LIT DESIGN

Allows the fitting to have a sleek and slim profile, making them suitable for applications where space is limited