


## KINGSTON PANEL UGR<19 TRI-COLOUR 600X600 27W TP(A) BLUETOOTH

NET-39-03-56

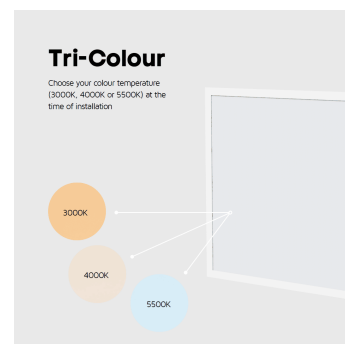

### Features & Benefits

- Controllable via App or Dimmable/Scene Switch
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- PMMA Light Guide path for even light distribution
- Selectable 3000K, 4000K or 5500K colour temperature
- Flicker-free driver

### Key Data

<b>Power</b>	27W
<b>Luminous Flux</b>	2900lm/3300lm/3000lm
<b>Colour Temperature</b>	3000K/4000K/5500K
<b>IP Rating</b>	IP40 Front/IP20 Rear
<b>Dimensions</b>	595 x 595 x 10mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-46-16-02	Universal LED Panel Suspension Kit
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-60-16-80	Tridonic Bluetooth Multifunction Dimmable/Scene Switch
NET-39-03-39	Panel Surface Box 600x600mm
NET-39-16-03	Burgess Z Clips for Kingston Panels
NET-39-16-05	Burgess Adjustable Z Clips for Kingston Panels

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.95
Luminaire Efficacy	122lm/W
LED Manufacturer	JUFEI
LED Type	SMD 4014
No. of LEDs	240
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	33-42V
Total Circuit Power (W)	27W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	95°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PC/PMMA
Weight	2.9Kg
Manufacturer	Lumlux Corp.
Frame Colour	White
Dimming Input Type	Bluetooth

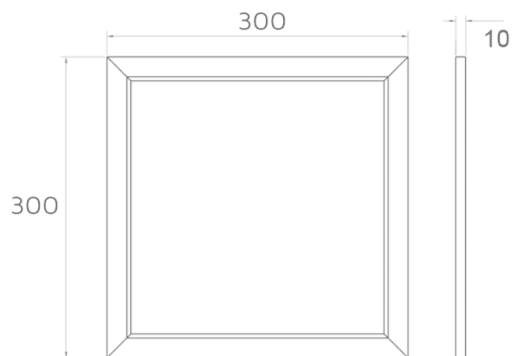

## Other Options

Description	
NET-39-03-04	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Standard
NET-39-03-09	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Emergency
NET-39-03-10	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable one4all
NET-39-03-11	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable Emergency
NET-39-03-53	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Self Test Emergency
NET-39-03-54	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable Self Test Emergency
NET-39-03-55	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Dimmable DALI Emergency
NET-39-03-56	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth
NET-39-03-57	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth Emergency
NET-39-03-58	Kingston Panel UGR<19 Tri-Colour 600x600 27W TP(a) Bluetooth Self Test Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

## WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

*Bluetooth options only*

## TRIDONIC DIMMABLE DRIVER


Customise lighting levels and reduce electricity consumption

*Dimmable options only*

## 3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

*Emergency options only*

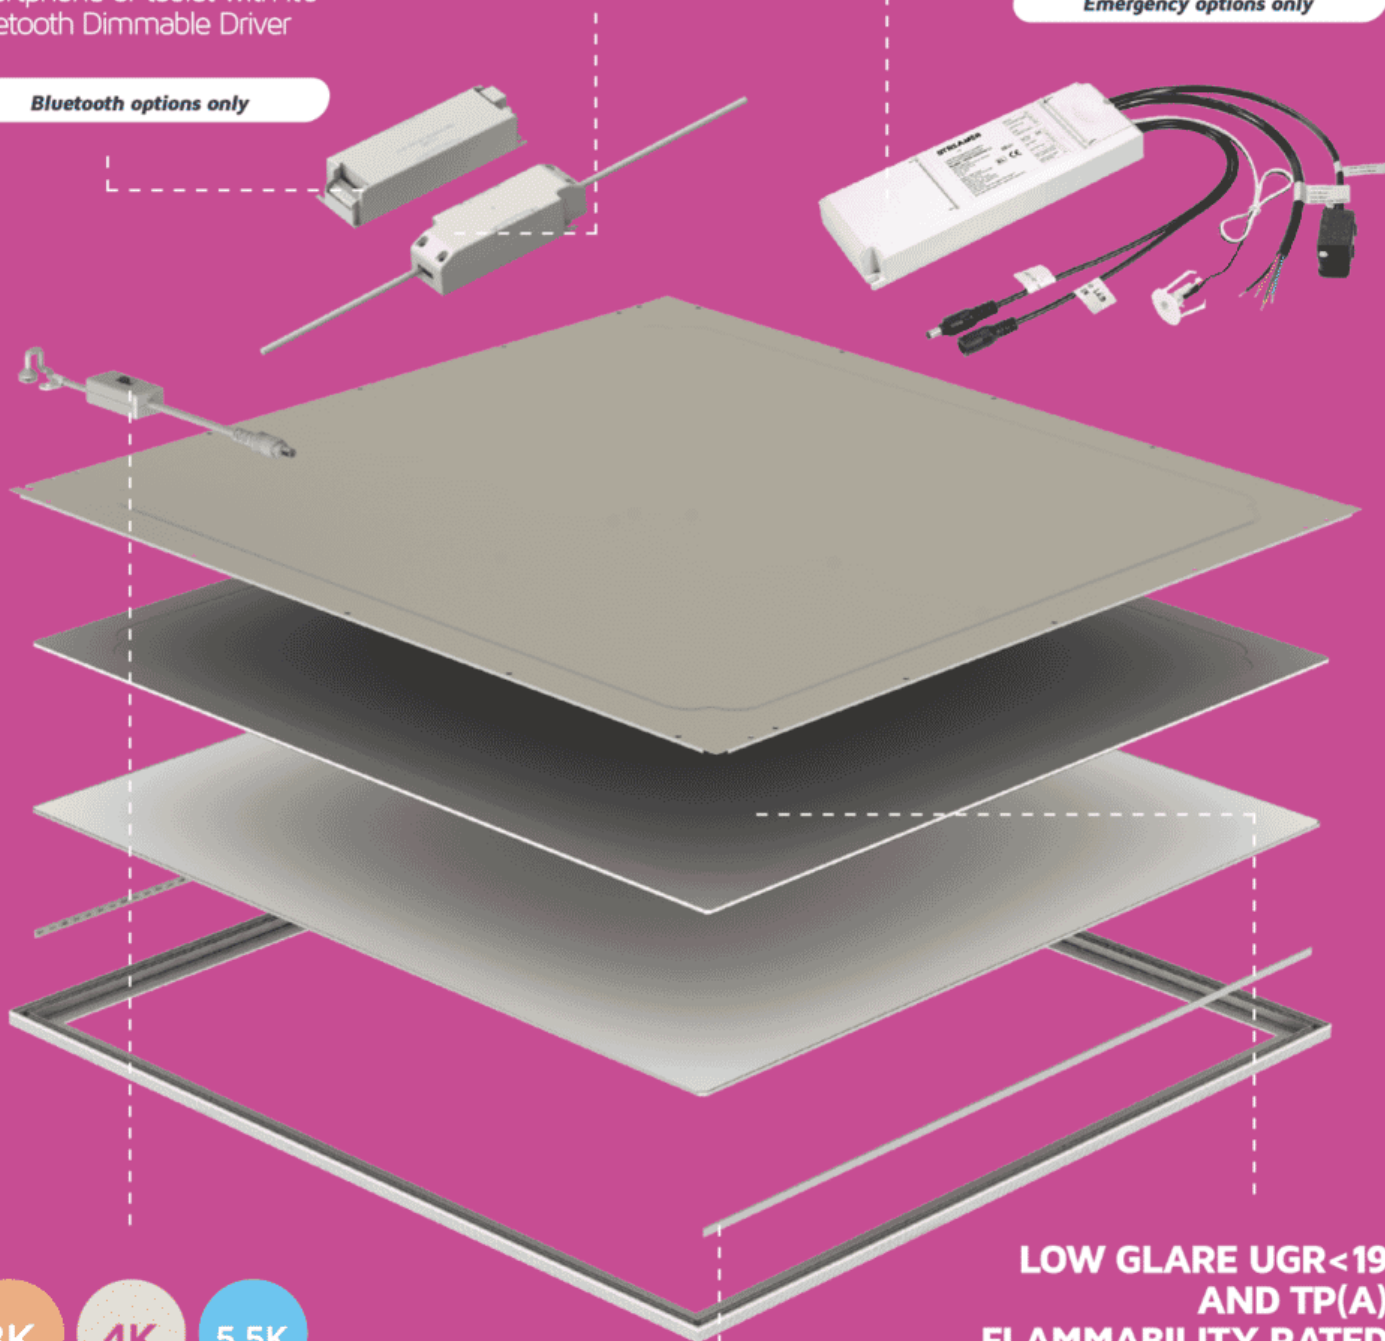

3K

4K

5.5K

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

## LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

## EDGE LIT DESIGN

Allows the fitting to have a sleek and slim profile, making them suitable for applications where space is limited