



KINGSTON PANEL UGR<19 TRI-COLOUR 1200X600 50W TP(A) DIMMABLE DALI

NET-39-03-66



Key Data

| | |
|--------------------|---------------------------------|
| Power | 50W |
| Luminous Flux | 4800lm/5500lm/5200lm |
| Colour Temperature | 3000K/4000K/5500K |
| IP Rating | IP40 Front/IP20 Rear |
| Dimensions | 1195 x 595 x 10mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-39-16-01 | Recess Clips (set of 4) |
| NET-46-16-02 | Universal LED Panel Suspension Kit |
| NET-42-43-24 | DALI Dimmer Switch |
| NET-39-03-43 | Panel Surface Box 1200x600mm |
| NET-43-16-05 | Suspension Kit for 1200x600mm Ashley Panels |
| NET-39-16-03 | Burgess Z Clips for Kingston Panels |
| NET-39-16-05 | Burgess Adjustable Z Clips for Kingston Panels |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|------------------------------|------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.95 |
| Luminaire Efficacy | 110lm/W |
| LED Manufacturer | JUFEI |
| LED Type | SMD 4014 |
| No. of LEDs | 456 |
| Driver Manufacturer | Tridonic Excite Series |
| Driver Output Voltage (DC) | 31-43V |
| Total Circuit Power (W) | 50W |
| Electrical Class | 3 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 95° |
| Dimmable | Yes |
| Flicker-Free | Yes |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| Diffuser Flammability Rating | TP(a) |
| UGR Rating | Less than 19 |
| Diffuser/LGP Material | PC/PMMA |
| Weight | 5.4Kg |
| Manufacturer | Lumlux Corp. |
| Frame Colour | White |
| Hours Maintained | 3H |
| Self Test | No |
| Battery Pack | LiFePO4 3.2V 4.5Ah |
| Dimming Input Type | DALI Addressable |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |
| Emergency Pack | DALI Addressable |

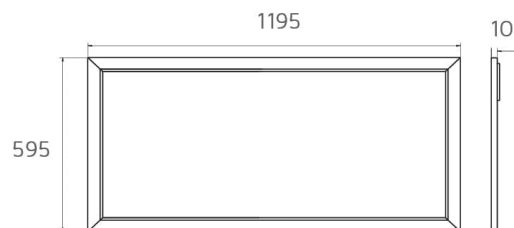

Other Options

| | Description |
|--------------|--|
| NET-39-03-08 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Standard |
| NET-39-03-15 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Emergency |
| NET-39-03-16 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable one4all |
| NET-39-03-17 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable Emergency |
| NET-39-03-63 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Self Test Emergency |
| NET-39-03-64 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable Self Test Emergency |
| NET-39-03-66 | Kingston Panel UGR<19 Tri-Colour 1200x600 50W TP(a) Dimmable DALI Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and reduce electricity consumption

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only



3K

4K

5.5K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

EDGE LIT DESIGN

Allows the fitting to have a sleek and slim profile, making them suitable for applications where space is limited