


## SHELFORD SLIM BULKHEAD TRI-COLOUR IP65 12W/18W MICROWAVE SENSOR

NET-41-06-06



### Features & Benefits

- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Selectable power setting 12W or 18W at the time of installation
- Selectable 3000K, 4000K or 6500K colour temperature
- IP65 rated housing

### Key Data

<b>Power</b>	12W/18W
<b>Luminous Flux</b>	1600lm/1800lm/1700lm (at 18W)
<b>Colour Temperature</b>	3000K/4000K/6500K
<b>IP Rating</b>	IP65
<b>Dimensions</b>	Ø320 x 70mm
<b>Warranty</b>	3 Years

### Compatible Accessories

NET-41-06-10	Chrome Ring for Shelford Slim Bulkheads
NET-41-06-12	Black Ring for Shelford Slim Bulkheads

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.8
Luminaire Efficacy	100lm/w
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	56
Total Circuit Power (w)	12W/18W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-10°C to +40°C
Lifespan LM80	30,000 Hours
UGR Rating	>22
Weight	0.682Kg
Manufacturer	Senselite Co. Ltd
Fire Rating	V2
Max. Detection Distance	10m
Max. Mounting Height	5m
Housing Colour	White
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Duration	5sec/1min/3min/10min
Max. Detection Area	10m
Sensor Manufacturer	Foxlux
Corridor Function	No

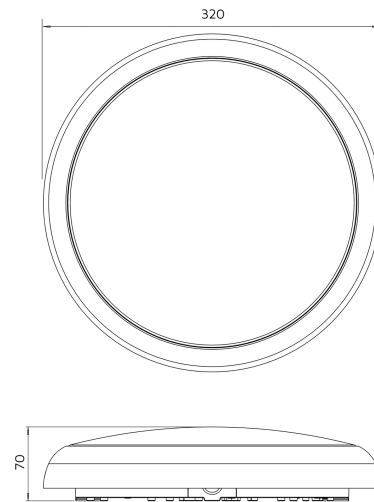

## Other Options

Description	
NET-41-06-02	Shelford Slim Bulkhead Tri-Colour IP65 12W/18W Standard
NET-41-06-04	Shelford Slim Bulkhead Tri-Colour IP65 12W/18W Emergency
NET-41-06-06	Shelford Slim Bulkhead Tri-Colour IP65 12W/18W Microwave Sensor
NET-41-06-08	Shelford Slim Bulkhead Tri-Colour IP65 12W/18W Microwave Sensor Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

## IP65 RATED HOUSING

Protect your bulkhead from water and dust

## TAMPER PROOF SCREWS

Prevent unwanted removal or tampering

## SELF TEST OR NON-SELF TEST AS STANDARD

Choose Self Test Emergency at the time of installation

*Emergency options only*

## INTEGRAL MICROWAVE SENSOR

Featuring a 2-10m detection range and 5sec to 10min hold time

*Microwave Sensor options only*

## DUAL WATTAGE DRIVER

Choose your power (12W or 18W) at the time of installation

3K

4K

6.5K

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 6500K

## PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

## 5 CABLE ENTRY POINTS

Reduce installation time with multiple entry points at the side and rear for easy wiring

