


## HILTON NCF TRI-COLOUR 1800MM (6FT) 62W/80W STANDARD

NET-41-11-11



### Features & Benefits

- Flicker-free, 0-10V dimmable driver as standard
- Selectable power setting 62W or 80W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings
- IP65 and IK10 rated housing

### Key Data

<b>Power</b>	62W/80W
<b>Luminous Flux</b>	8060lm/10400lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Dimensions</b>	1840 x 100 x 85mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-61-33-04	DALI Emergency Kit 3W/6W
NET-42-43-33	Merrytek Microwave Sensor IP65 with Standby Function (External)
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	24-42V
Total Circuit Power (W)	62W/80W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	-10°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.740Kg
Manufacturer	Senselight
Fire Rating	V2
Housing Colour	Grey
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Dimming Input Type	0-10V as Standard

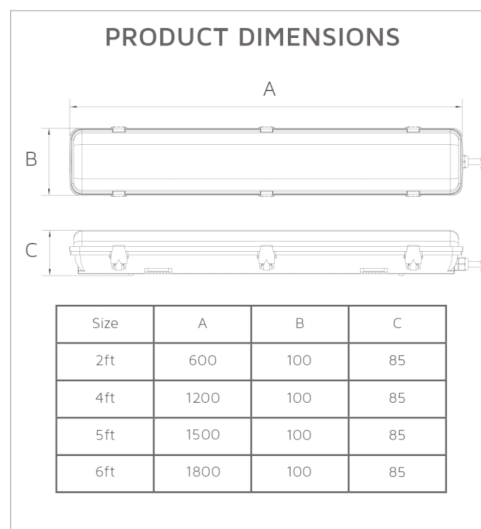

## Other Options

Description	
NET-41-11-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Standard
NET-41-12-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Emergency
NET-41-12-13	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Self Test Emergency
NET-41-11-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable one4all
NET-41-12-15	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable Emergency
NET-41-12-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable DALI Emergency
NET-41-11-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor
NET-41-12-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor Emergency
NET-41-11-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor
NET-41-12-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

**130**  
lm/W

**COMBINED DIFFUSER  
AND LEDS**

Stop juggling multiple parts  
when installing with a  
diffuser that comes with  
built-in LEDs

**PUSH  
CONNECTOR**

Reduce installation time  
with easy-to-use push  
fit terminals

**0-10V DIMMABLE  
DUAL WATTAGE  
BOKE DRIVER**

Choose your power setting  
at the time of installation and  
easily add controls with  
0-10V protocol

**IP65 AND IK10  
RATED HOUSING**

Protect your fitting from water,  
dust and impact

**3H EMERGENCY  
OPERATION**

Ensures the fitting comes on in  
the event of a power failure

**TAMPER-PROOF  
FIXINGS**

Prevent unwanted removal  
or tampering

*Emergency options only*