

HILTON NCF TRI-COLOUR 1500MM (5FT) 35W/60W STEP DIMMING MICROWAVE

NET-41-11-66



STEP Dimming function

Adjust the light output in steps 0, 10 or 30% Standby Dimming Level



Integral Microwave and Daylight Sensor

Ensures the fitting only comes on when insufficient light and movement are detected



Features & Benefits

- Integral Microwave and Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected
- STEP Dimming function - 0, 10 or 30%
- Selectable power setting 35W or 60W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings

Key Data

Power	35W/60W
Luminous Flux	4500lm/7800lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP65
IK Rating	IK08
Dimensions	1540 x 100 x 85mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-04	DALI Emergency Kit 3W/6W
NET-46-16-04	Universal LED NCF / Batten Suspension Kit

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	360
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	30-54V
Total Circuit Power (W)	35W/60W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.220Kg
Manufacturer	Senselight
Fire Rating	V2
Lux Levels	30lux/50lux/100lux or Disabled
Max. Detection Distance	2.5m
Housing Colour	Grey
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Dimming Input Type	Step Dimming
Dimming Range	0-100%
Duration	5s-30min
Max. Detection Area	6m

Other Options

Description	
NET 4 in 1	IP20 Hilton NCF Tri-Colour 1500mm (5ft) 35W/60W Step Dimming Microwave Sensor
NET Dimming Level	0%, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100% or Disabled
NET Emergency	IP20 Hilton NCF Tri-Colour 1500mm (5ft) 35W/60W Step Dimming Microwave Sensor Emergency

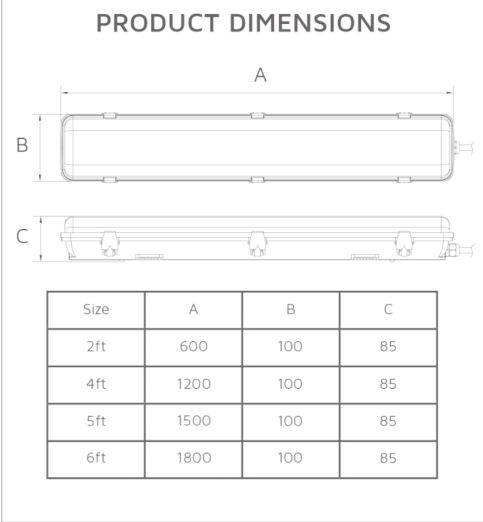


NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY



Comes with
integral 2-in-1
Microwave and
Daylight sensor

Step Dimming Tri-Colour Dual Wattage LED NCFs

Integral Microwave **and** Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected.

Its 0, 10 or 30% Standby Mode provides a lower lighting level when full brightness isn't necessary, providing visibility and safety whilst minimising energy consumption.

Part Number	Description	Dimensions	Power	Lumens	Colour Temp.
NET-41-11-66	Microwave Sensor with Step Dimming	1540 x 100 x 85mm (5ft)	48W/60W	6240lm/7800lm	3000K/4000K/5700K
NET-41-12-66	Microwave Sensor Emergency with Step Dimming	1540 x 100 x 85mm (5ft)	48W/60W	6240lm/7800lm	3000K/4000K/5700K