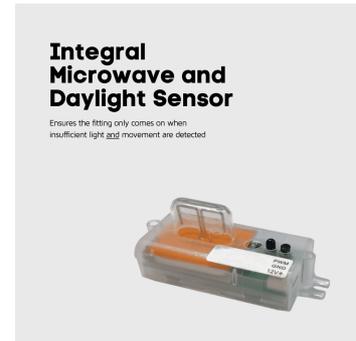


FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 30W/50W STEP DIMMING

NET-41-11-87


Features & Benefits

- Integral Microwave and Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected
- STEP Dimming function - 0, 10 or 30%
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Push connector for quick and easy installation
- Diffuser comes with built-in LEDs

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 30W/50W |
| Luminous Flux | 3900lm/6500lm |
| Colour Temperature | 3000K/4000K/5700K |
| IP Rating | IP20 |
| IK Rating | IK04 |
| Dimensions | 1520 x 63 x 73mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|---|
| NET-61-33-03 | DALI Emergency Kit 3W |
| NET-61-33-04 | DALI Emergency Kit 3W/6W |
| NET-46-16-04 | Universal LED NCF / Batten Suspension Kit |

NET LED Lighting

 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|-----------------------------------|--------------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.90 |
| Luminaire Efficacy | 130lm/W |
| LED Manufacturer | Jingrui |
| LED Type | SMD 2835 |
| No. of LEDs | 264 |
| Driver Manufacturer | Merrytek |
| Driver Output Voltage (DC) | 90-175V |
| Total Circuit Power (W) | 30W/50W |
| Electrical Class | 1 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable | Yes |
| Flicker-Free | Yes |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| UGR Rating | More than 22 |
| Weight | 1.775Kg |
| Manufacturer | Senselight |
| Fire Rating | V2 |
| Lux Levels | 30lux/50lux/100lux or Disabled |
| Max. Detection Distance | 2.5m |
| Housing Colour | White |
| Housing Material | Steel |
| Diffuser Material | Polycarbonate |
| Dimming Input Type | Step Dimming |
| Duration | 5s-30min |
| Emergency Kit | 3 Year Warranty |
| Sensor Manufacturer | Merrytek |

Other Options
Sensor Manufacturer

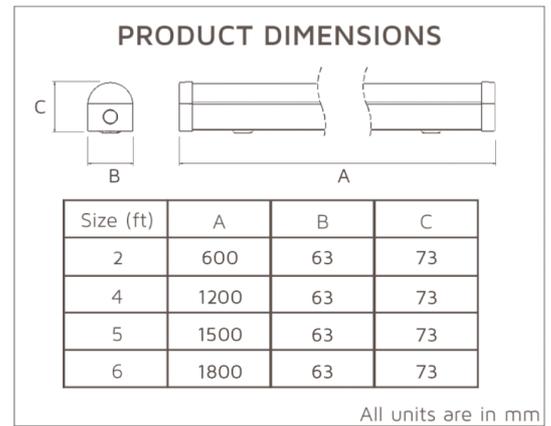

| Description | |
|---------------------------------------|---|
| NET-41-11-87 Standby Dimming Level | 0%, 10% or 30% Foxton Batten Tri-Colour 1500mm (5ft) 30W/50W Step Dimming Microwave Sensor |
| NET-41-11-88 | Foxton Batten Tri-Colour 1500mm (5ft) 30W/50W Step Dimming Microwave Sensor Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY



Comes with
integral 2-in-1
Microwave and
Daylight sensor

Step Dimming Tri-Colour LED Battens

Integral Microwave **and** Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected.

Its 0, 10 or 30% Standby Mode provides a lower lighting level when full brightness isn't necessary, providing visibility and safety whilst minimising energy consumption.

| Part Number | Description | Dimensions | Power | Lumens | Colour Temp. |
|--------------|---|------------------------|-------|--------|-------------------|
| NET-41-11-87 | Step Dimming Microwave Sensor | 1520 x 63 x 73mm (5ft) | 50W | 6500lm | 3000K/4000K/5700K |
| NET-41-11-88 | Step Dimming Microwave Sensor Emergency | 1520 x 63 x 73mm (5ft) | 50W | 6500lm | 3000K/4000K/5700K |