


FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 30W/50W STEP DIMMING

NET-41-11-88

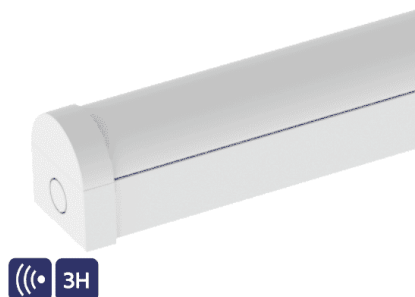

Self Test or non-Self Test Emergency operation

Choose between Self Test Emergency or non-Self Test Emergency



STEP Dimming function

Adjust the light output in steps 0, 10 or 30% Standby Dimming Level



Features & Benefits

- Self Test Emergency or non-Self Test Emergency
- Integral Microwave and Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected
- STEP Dimming function - 0, 10 or 30%
- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Push connector for quick and easy installation

Key Data

Power	30W/50W
Luminous Flux	3900lm/6500lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	1520 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-04	Universal LED NCF / Batten Suspension Kit
--------------	---

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY


Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	264
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	90-175V
Total Circuit Power (W)	30W/50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	1.775Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Lux Levels	30lux/50lux/100lux or Disabled
Max. Detection Distance	2.5m
Self Test	Yes
Housing Colour	White
Housing Material	Steel
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	Step Dimming

Diffuser Material
Other Options
Dimming Input Type

Dimming Level		Step Dimming		Description	
Emergency Kit	NET-4111-87	3 Year Warranty	Foran Batten Tri-Colour 1500mm (5ft) 30W/50W Step Dimming Microwave Sensor		
Emergency Operation	NET-4111-88	Foran Batten Tri-Colour 1500mm (5ft) 30W/50W Step Dimming Microwave Sensor	Emergency		
Sensor Manufacturer		Merrytek			
Sensor IP Rating		IP20			
Standby Dimming Level		0%, 10% or 30%			

PRODUCT DIMENSIONS

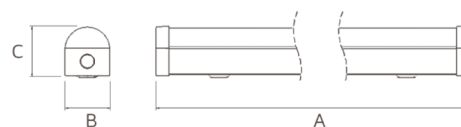

Size (ft)	A	B	C
2	600	63	73
4	1200	63	73
5	1500	63	73
6	1800	63	73

All units are in mm

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



Step Dimming Tri-Colour LED Battens

Integral Microwave **and** Daylight Sensor ensures the fitting only comes on when insufficient light and movement are detected.

Its 0, 10 or 30% Standby Mode provides a lower lighting level when full brightness isn't necessary, providing visibility and safety whilst minimising energy consumption.

Part Number	Description	Dimensions	Power	Lumens	Colour Temp.
NET-41-11-87	Step Dimming Microwave Sensor	1520 x 63 x 73mm (5ft)	50W	6500lm	3000K/4000K/5700K
NET-41-11-88	Step Dimming Microwave Sensor Emergency	1520 x 63 x 73mm (5ft)	50W	6500lm	3000K/4000K/5700K