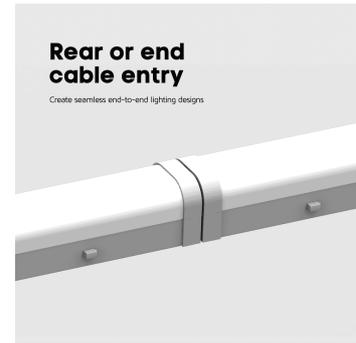


FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 25W STANDARD

NET-41-11-93


Features & Benefits

- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation
- Diffuser comes with built-in LEDs

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 25W |
| Luminous Flux | 3250lm |
| Colour Temperature | 3000K/4000K/5700K |
| IP Rating | IP20 |
| IK Rating | IK04 |
| Dimensions | 1520 x 63 x 73mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-61-33-04 | DALI Emergency Kit 3W/6W |
| NET-42-43-38 | Merrytek Microwave Sensor IP65 20mm Knock Out |
| NET-46-16-04 | Universal LED NCF / Batten Suspension Kit |
| NET-51-11-01 | PIR Sensor (External) for Battens and NCFs |
| NET-51-11-03 | On/Off Step Dimming Sensor (External) for Battens and NCFs |

NET LED Lighting

 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|--------------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.90 |
| Luminaire Efficacy | 130lm/W |
| LED Manufacturer | Jingrui |
| LED Type | SMD 2835 |
| No. of LEDs | 264 |
| Driver Manufacturer | Tridonic Advanced Series |
| Driver Output Voltage (DC) | 20-54V |
| Total Circuit Power (W) | 25W |
| Electrical Class | 1 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable | No |
| Flicker-Free | Yes |
| Operating Temp. | -10°C to +40°C |
| Lifespan LM80 | 50,000 Hours |
| UGR Rating | More than 22 |
| Weight | 1.775Kg |
| Manufacturer | Senselight |
| Fire Rating | V2 |
| Housing Colour | White |
| Housing Material | Steel |
| Diffuser Material | Polycarbonate |

PRODUCT DIMENSIONS

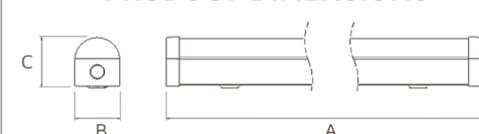

| Size (ft) | A | B | C |
|-----------|------|----|----|
| 2 | 600 | 63 | 73 |
| 4 | 1200 | 63 | 73 |
| 5 | 1500 | 63 | 73 |
| 6 | 1800 | 63 | 73 |

All units are in mm

Other Options

| Description | |
|--------------|--|
| NET-41-11-93 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Standard |
| NET-41-11-94 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Emergency |
| NET-41-12-94 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Self Test Emergency |
| NET-41-11-06 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Dimmable one4all |
| NET-41-11-07 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Dimmable Emergency |
| NET-41-11-77 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W Dimmable DALI Emergency |
| NET-41-11-78 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W PIR Sensor On/Off |
| NET-41-11-79 | Foxtton Batten Tri-Colour 1500mm (5ft) 25W PIR Sensor On/Off Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY



**SELECTABLE
COLOUR
TEMPERATURE**

Choose your colour temperature
3000K, 4000K or 5700K

**COMBINED DIFFUSER
AND LEDS**

Stop juggling multiple parts
and install a diffuser that comes
with built-in LEDs

PUSH CONNECTOR

Reduce installation time with
easy-to-use push fit terminals

**TRIDONIC DRIVER
AS STANDARD**

Ensure reliability, durability and
performance leading to
long-lasting LEDs

**REAR OR END
CABLE ENTRY**

Create seamless
end-to-end lighting designs

