



FOXTON BATTEN TRI-COLOUR 1500MM (5FT) 50W STANDARD

NET-41-11-96

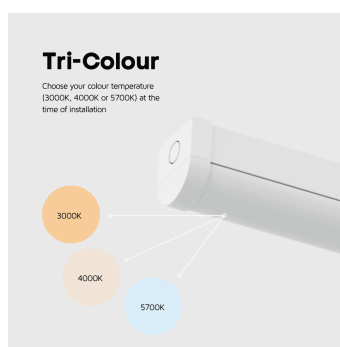

Features & Benefits

- Selectable colour temperature 3000K, 4000K or 5700K
- Rear or end cable entry
- Tridonic driver as standard
- Push connector for quick and easy installation
- Diffuser comes with built-in LEDs

Key Data

Power	50W
Luminous Flux	6500lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP20
IK Rating	IK04
Dimensions	1520 x 63 x 73mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-04	DALI Emergency Kit 3W/6W
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	Tridonic Advanced Series
Driver Output Voltage (DC)	20-54V
Total Circuit Power (W)	50W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	-10°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	1.830Kg
Manufacturer	Senselight
Fire Rating	V2
Housing Colour	White
Housing Material	Steel
Diffuser Material	Polycarbonate

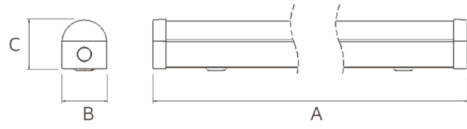PRODUCT DIMENSIONS			
			
Size (ft)	A	B	C
2	600	63	73
4	1200	63	73
5	1500	63	73
6	1800	63	73

All units are in mm

Other Options

Description	
NET-41-11-96	Foxton Batten Tri-Colour 1500mm (5ft) 50W Standard
NET-41-11-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Emergency
NET-41-12-95	Foxton Batten Tri-Colour 1500mm (5ft) 50W Self Test Emergency
NET-41-11-13	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable one4all
NET-41-11-14	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable Emergency
NET-41-11-82	Foxton Batten Tri-Colour 1500mm (5ft) 50W Dimmable DALI Emergency
NET-41-11-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off
NET-41-12-83	Foxton Batten Tri-Colour 1500mm (5ft) 50W PIR Sensor On/Off Emergency
NET-41-11-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth
NET-41-12-84	Foxton Batten Tri-Colour 1500mm (5ft) 50W Bluetooth Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

130
lm/W



**SELECTABLE
COLOUR
TEMPERATURE**

Choose your colour temperature
3000K, 4000K or 5700K

**COMBINED DIFFUSER
AND LEDS**

Stop juggling multiple parts
and install a diffuser that comes
with built-in LEDs

PUSH CONNECTOR

Reduce installation time with
easy-to-use push fit terminals

**REAR OR END
CABLE ENTRY**

Create seamless
end-to-end lighting designs

**TRIDONIC DRIVER
AS STANDARD**

Ensure reliability, durability and
performance leading to
long-lasting LEDs

