
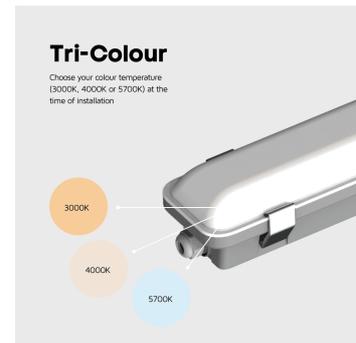


## HILTON NCF TRI-COLOUR 1500MM (5FT) 48W/60W SELF TEST EMERGENCY

NET-41-12-06



### Features & Benefits

- Self Test Emergency function
- Flicker-free, 0-10V dimmable driver as standard
- Selectable power setting 48W or 60W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings

### Key Data

<b>Power</b>	48W/60W
<b>Luminous Flux</b>	6240lm/7800lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Dimensions</b>	1540 x 100 x 85mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-42-43-33	Merrytek Microwave Sensor IP65 with Standby Function (External)
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	360
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	24-42V
Total Circuit Power (W)	48W/60W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.220Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	Yes
Housing Colour	Grey
Housing Material	Polycarbonate
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	0-10V as Standard
Emergency Kit	3 Year Warranty
Emergency Operation	>3H

Other Options

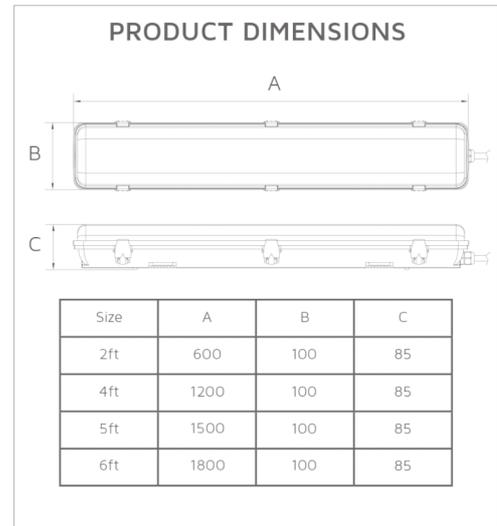

Description	
NET-41-11-05	Hilton NCF Tri-Colour 1500mm (5ft) 48W/60W Standard
NET-41-12-05	Hilton NCF Tri-Colour 1500mm (5ft) 48W/60W Emergency
NET-41-12-06	Hilton NCF Tri-Colour 1500mm (5ft) 48W/60W Self Test Emergency
NET-41-11-12	Hilton NCF Tri-Colour 1500mm (5ft) 60W Dimmable one4all
NET-41-12-12	Hilton NCF Tri-Colour 1500mm (5ft) 60W Dimmable Emergency
NET-41-11-90	Hilton NCF Tri-Colour 1500mm (5ft) 60W Dimmable DALI Emergency
NET-41-11-60	Hilton NCF Tri-Colour 1500mm (5ft) 48W/60W Step Dimming PIR Sensor
NET-41-12-60	Hilton NCF Tri-Colour 1500mm (5ft) 48W/60W Step Dimming PIR Sensor Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

**130**  
lm/W

### COMBINED DIFFUSER AND LEDS

Stop juggling multiple parts when installing with a diffuser that comes with built-in LEDs

### PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals

### 0-10V DIMMABLE DUAL WATTAGE BOKE DRIVER

Choose your power setting at the time of installation and easily add controls with 0-10V protocol

### IP65 AND IK10 RATED HOUSING

Protect your fitting from water, dust and impact

### 3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

### TAMPER-PROOF FIXINGS

Prevent unwanted removal or tampering



*Emergency options only*

