
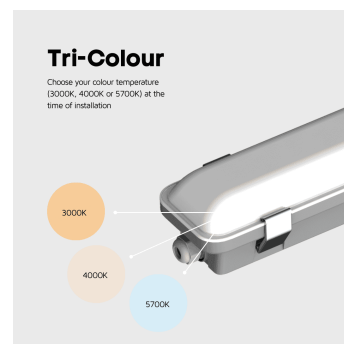


HILTON NCF TRI-COLOUR 1800MM (6FT) 62W/80W EMERGENCY

NET-41-12-11



Features & Benefits

- 3H Emergency function
- Flicker-free, 0-10V dimmable driver as standard
- Selectable power setting 62W or 80W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings

Key Data

Power	62W/80W
Luminous Flux	8060lm/10400lm
Colour Temperature	3000K/4000K/5700K
IP Rating	IP65
IK Rating	IK08
Dimensions	1840 x 100 x 85mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-42-43-33	Merrytek Microwave Sensor IP65 with Standby Function (External)
NET-42-43-38	Merrytek Microwave Sensor IP65 20mm Knock Out
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	24-42V
Total Circuit Power (W)	62W/80W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.740Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	No
Housing Colour	Grey
Housing Material	Polycarbonate
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	0-10V as Standard
Emergency Kit	3 Year Warranty
Emergency Operation	>3H

Other Options

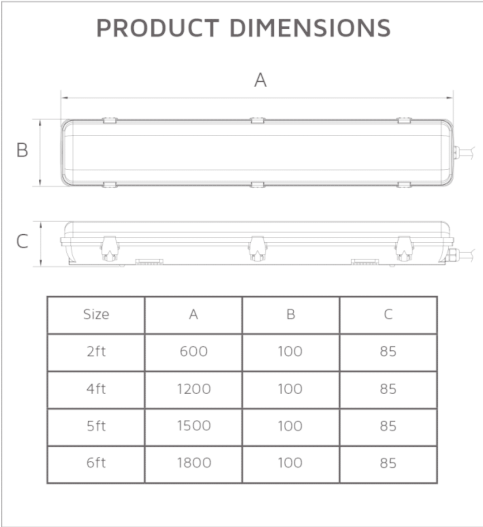

Description	
NET-41-11-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Standard
NET-41-12-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Emergency
NET-41-12-13	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Self Test Emergency
NET-41-11-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable one4all
NET-41-12-15	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable Emergency
NET-41-12-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable DALI Emergency
NET-41-11-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor
NET-41-12-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor Emergency
NET-41-11-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor
NET-41-12-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

130
lm/W

**COMBINED DIFFUSER
AND LEDS**

Stop juggling multiple parts
when installing with a
diffuser that comes with
built-in LEDs

**0-10V DIMMABLE
DUAL WATTAGE
BOKE DRIVER**

Choose your power setting
at the time of installation and
easily add controls with
0-10V protocol



**3H EMERGENCY
OPERATION**

Ensures the fitting comes on in
the event of a power failure

Emergency options only

**PUSH
CONNECTOR**

Reduce installation time
with easy-to-use push
fit terminals

**IP65 AND IK10
RATED HOUSING**

Protect your fitting from water,
dust and impact

**TAMPER-PROOF
FIXINGS**

Prevent unwanted removal
or tampering

