


## HILTON NCF TRI-COLOUR 1800MM (6FT) 62W/80W SELF TEST EMERGENCY

NET-41-12-13

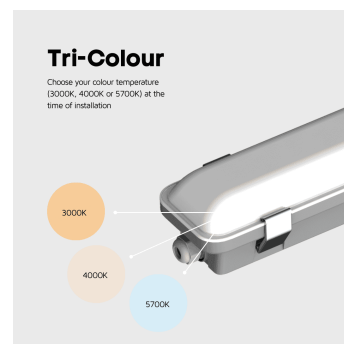

### Features & Benefits

- Self Test Emergency function
- Flicker-free, 0-10V dimmable driver as standard
- Selectable power setting 62W or 80W
- Selectable colour temperature 3000K, 4000K or 5700K
- Diffuser comes with built-in LEDs
- Tamper-proof fixings

### Key Data

<b>Power</b>	62W/80W
<b>Luminous Flux</b>	8060lm/10400lm
<b>Colour Temperature</b>	3000K/4000K/5700K
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Dimensions</b>	1840 x 100 x 85mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-42-43-33	Merrytek Microwave Sensor IP65 with Standby Function (External)
NET-46-16-04	Universal LED NCF / Batten Suspension Kit
NET-51-11-01	PIR Sensor (External) for Battens and NCFs
NET-51-11-03	On/Off Step Dimming Sensor (External) for Battens and NCFs

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)




**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	130lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	480
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	24-42V
Total Circuit Power (W)	62W/80W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 22
Weight	2.740Kg
Manufacturer	Senselight
Fire Rating	V2
Hours Maintained	3H
Self Test	Yes
Housing Colour	Grey
Housing Material	Polycarbonate
Battery Pack	LiFePO4
Diffuser Material	Polycarbonate
Dimming Input Type	0-10V as Standard
Emergency Kit	3 Year Warranty
Emergency Operation	>3H

Other Options

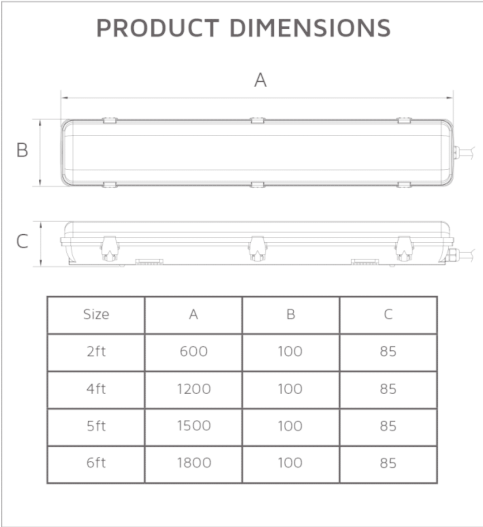

Description	
NET-41-11-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Standard
NET-41-12-11	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Emergency
NET-41-12-13	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Self Test Emergency
NET-41-11-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable one4all
NET-41-12-15	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable Emergency
NET-41-12-21	Hilton NCF Tri-Colour 1800mm (6ft) 80W Dimmable DALI Emergency
NET-41-11-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor
NET-41-12-67	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming PIR Sensor Emergency
NET-41-11-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor
NET-41-12-89	Hilton NCF Tri-Colour 1800mm (6ft) 62W/80W Step Dimming Microwave Sensor Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM  
FOR NEXT DAY DELIVERY

130  
lm/W

COMBINED DIFFUSER  
AND LEDS

Stop juggling multiple parts  
when installing with a  
diffuser that comes with  
built-in LEDs

0-10V DIMMABLE  
DUAL WATTAGE  
BOKE DRIVER

Choose your power setting  
at the time of installation and  
easily add controls with  
0-10V protocol



3H EMERGENCY  
OPERATION

Ensures the fitting comes on in  
the event of a power failure

Emergency options only

PUSH  
CONNECTOR

Reduce installation time  
with easy-to-use push  
fit terminals

IP65 AND IK10  
RATED HOUSING

Protect your fitting from water,  
dust and impact

TAMPER-PROOF  
FIXINGS

Prevent unwanted removal  
or tampering

