

MERRYTEK MICROWAVE SENSOR IP65 WITH STANDBY FUNCTION (EXTERNAL)

NET-42-43-36


Features & Benefits

- Wide detection area – up to 8m in diameter / 15m high
- Detection Area, Illumination Duration and Light Sensor can be set via Remote Control
- A standby light level can be pre-set using 1-10V technology to 10%, 20%, 30% or 50%
- Easy to install and adjust
- Allows you to switch any manufacturer's Luminaire up to 800W load

Key Data

IP Rating	IP65
Dimensions	Ø72 x 59mm
Warranty	3 Years

Compatible Accessories

NET-23-12-12	Orwell High Bay 5000K 100W Standard
NET-23-12-14	Orwell High Bay 5000K 150W Standard
NET-23-12-16	Orwell High Bay 5000K 200W Standard
NET-42-43-22	Merrytek Remote Control for Sensors

NET LED Lighting


 Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ

 T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Operating Temp.	-15°C to +45°C
Manufacturer	Merrytek
Lux Levels	5lux - 150lux or Disabled
Max. Detection Distance	15m
Max. Load	800W
Power Frequency	50Hz
Housing Colour	Black
Housing Material	Polycarbonate
Detection Angle	150°(wall mt) / 360°(ceiling mt)
Duration	5s - 30min

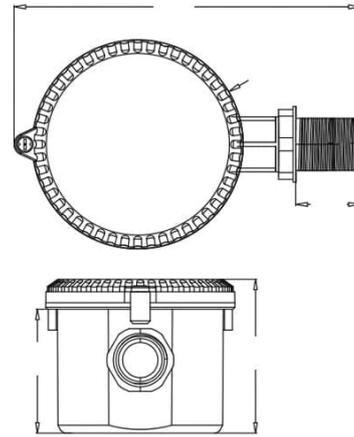

Other Options

Description	
NET-42-43-36	Merrytek Microwave Sensor IP65 with Standby Function (External)

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk