



ASHLEY PANEL UGR<19 TRI-COLOUR 600X600 30W TP(A) DIMMABLE - PUSH/DALI

NET-43-03-22

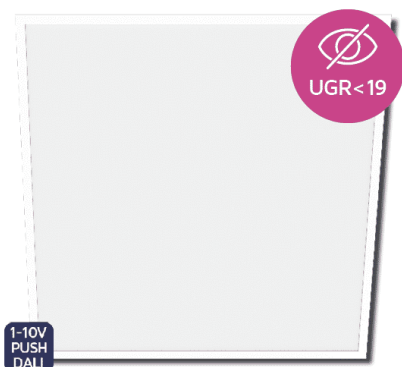

Features & Benefits

- Merrytek 2-in-1 Dimming - DALI/Push
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free driver
- Backlit for a uniform light distribution

Key Data

Power	30W
Luminous Flux	3560lm/3780lm/3700lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP20
Dimensions	595 x 595 x 32mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-43-16-04	Suspension Kit for 600x600mm Ashley Panels

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	147lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	42
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	1.56Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Self Test	No
Dimming Input Type	Merrytek 2-in-1 Dimming - DALI/Push

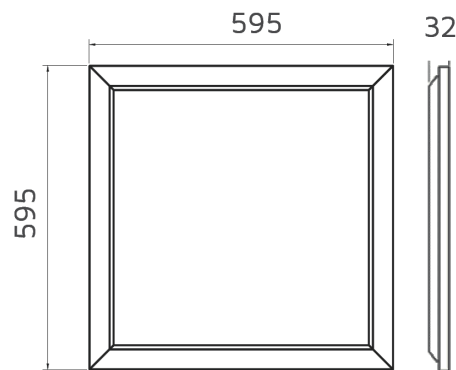

All units are in mm

Other Options

Description	
NET-43-03-20	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Standard
NET-43-03-21	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Emergency
NET-43-03-22	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable - Push/DALI
NET-43-03-23	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Emergency
NET-43-03-29	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Self Test Emergency
NET-43-03-24	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Self Test Emergency
NET-43-03-25	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable DALI Emergency
NET-43-03-26	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Bluetooth
NET-43-03-27	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Bluetooth Emergency
NET-43-03-28	Ashley Panel UGR<19 Tri-Colour 600x600 30W TP(a) Bluetooth Self Test Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

Up to
145
lm/W

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only

DIMMABLE DRIVER


Customise lighting levels and reduce electricity consumption

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only

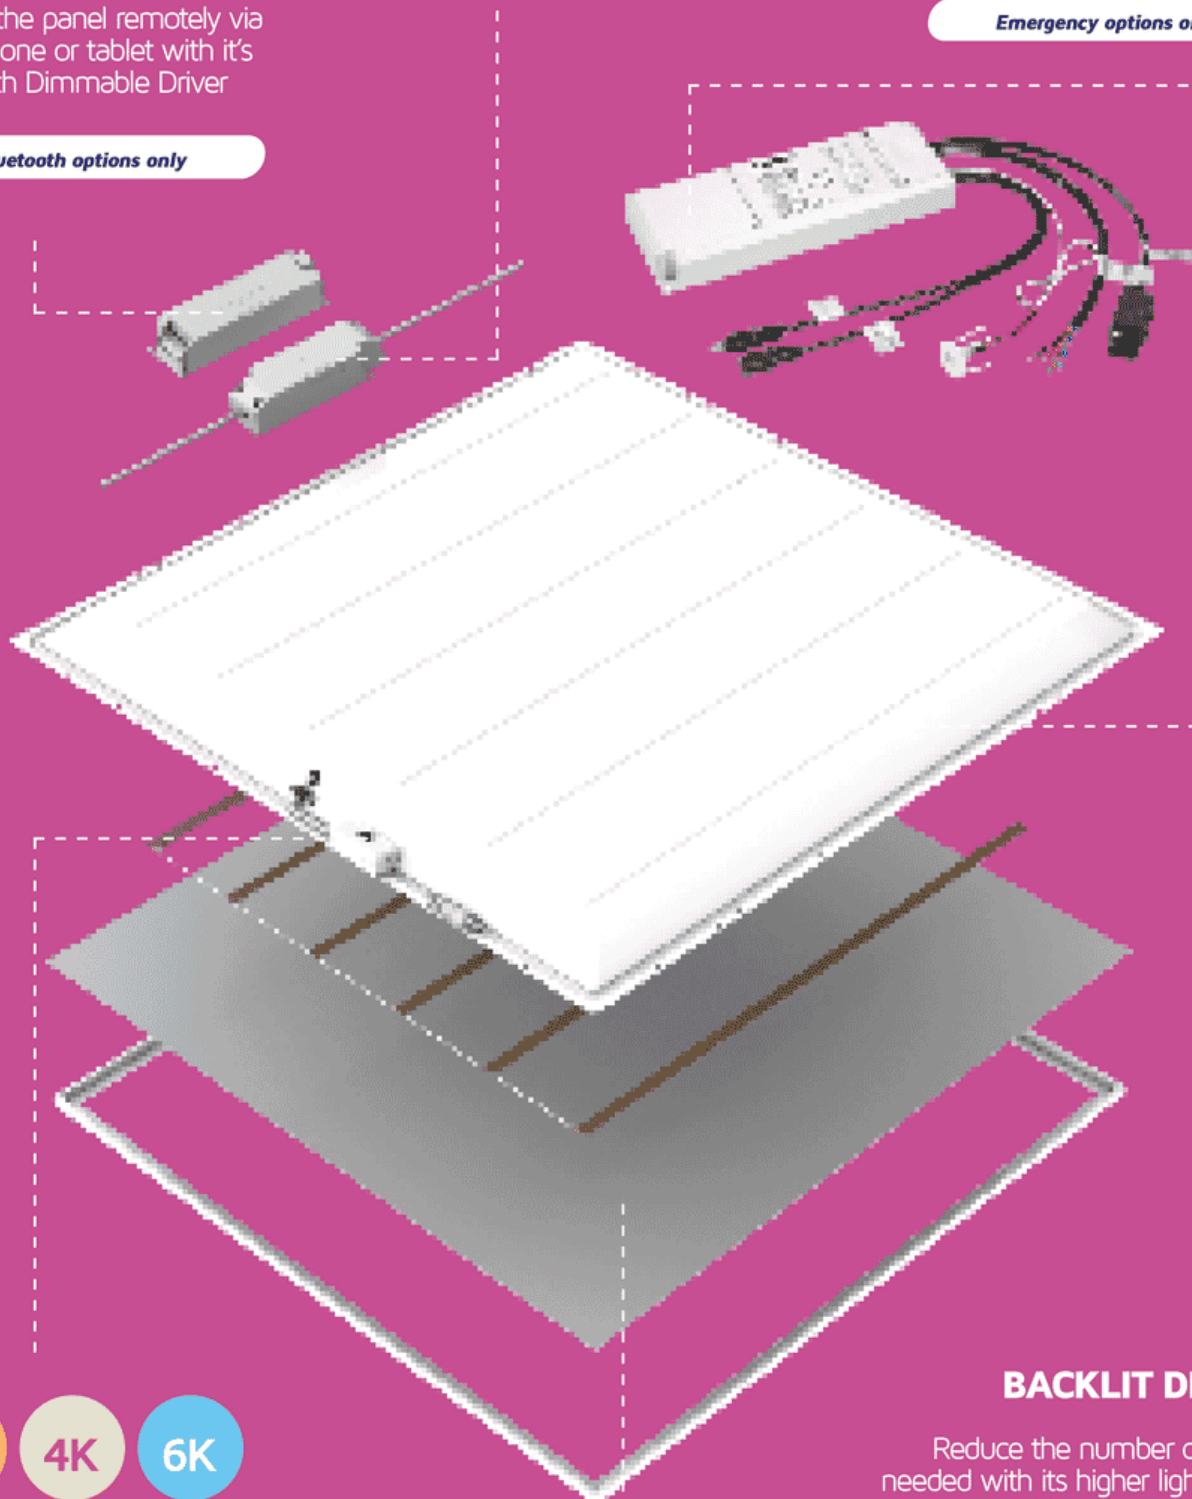

3K

4K

6K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 6000K

BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations