
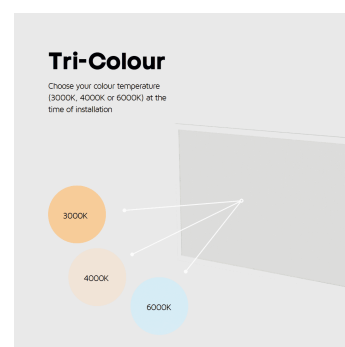


ASHLEY PANEL UGR<19 TRI-COLOUR 1200X600 42W TP(A) DIMMABLE - PUSH/DALI

NET-43-03-32

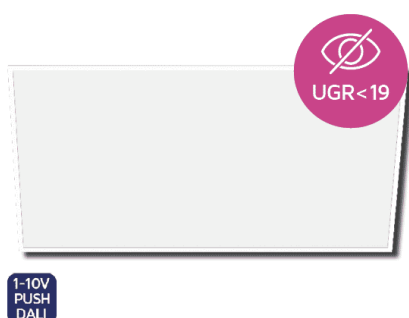

Features & Benefits

- Merrytek 2-in-1 Dimming - DALI/Push
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free driver
- Backlit for a uniform light distribution

Key Data

Power	42W
Luminous Flux	5000lm/5330lm/5220lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP20
Dimensions	1195 x 595 x 32mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-39-03-43	Panel Surface Box 1200x600mm
NET-43-16-05	Suspension Kit for 1200x600mm Ashley Panels

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	126lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	84
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	42W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	3.2Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Self Test	No
Dimming Input Type	DALI 1 & 2 and switchDIM (Push)



Other Options

Description	
NET-43-03-30	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Standard
NET-43-03-31	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Emergency
NET-43-03-32	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Dimmable - Push/DALI
NET-43-03-33	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Dimmable Emergency
NET-43-03-36	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Self Test Emergency
NET-43-03-34	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Dimmable Self Test Emergency
NET-43-03-35	Ashley Panel UGR<19 Tri-Colour 1200x600 42W TP(a) Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

Up to
145
lm/W

WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with it's Bluetooth Dimmable Driver

Bluetooth options only

DIMMABLE DRIVER


Customise lighting levels and reduce electricity consumption

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only

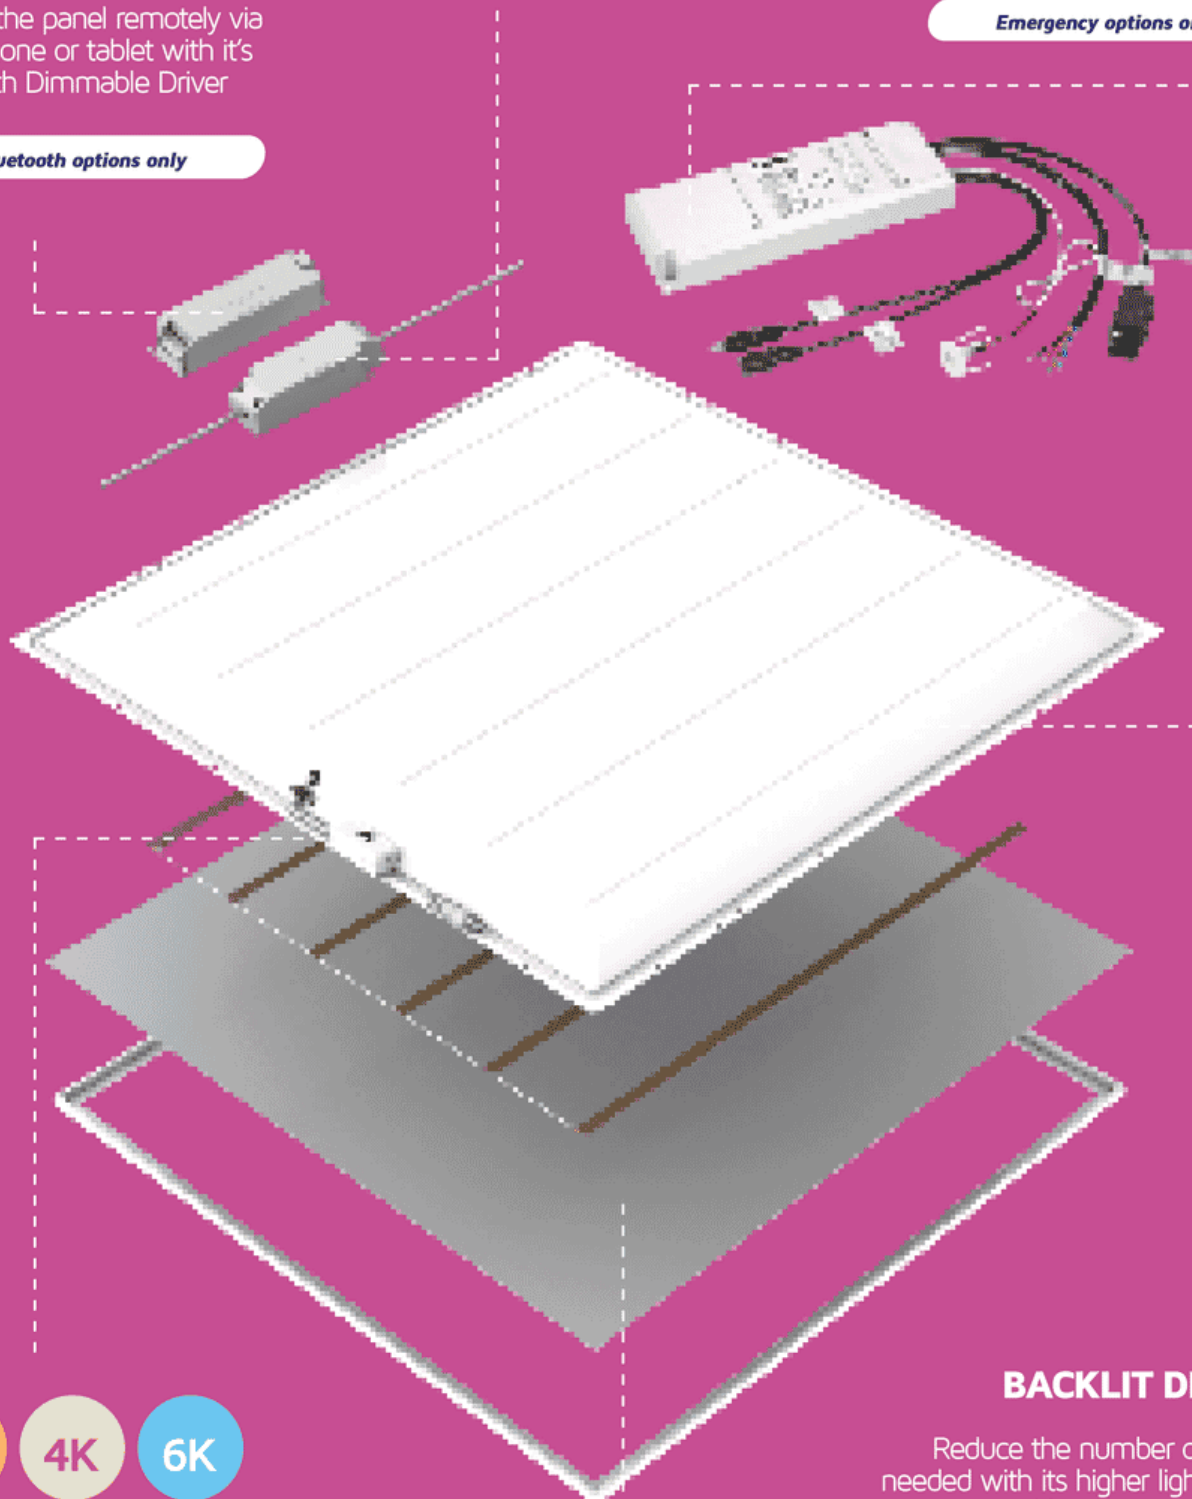

3K

4K

6K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 6000K

BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations