




ASHLEY PANEL UGR<19 4000K 600X600 36W TP(A) EMERGENCY

NET-43-03-61

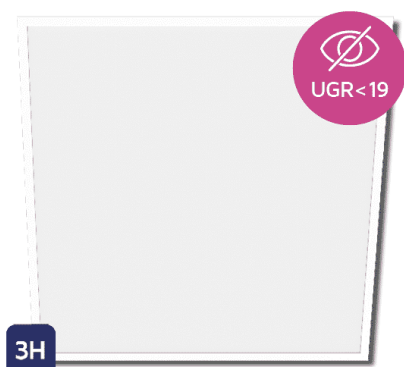

Features & Benefits

- 3H Emergency function
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Single colour temperature 4000K
- Flicker-free driver
- Backlit for a uniform light distribution

Key Data

Power	36W
Luminous Flux	3635lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	595 x 595 x 25mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-60-43-80	Tridonic Triac Dimmable Driver 30W/45W (600x600mm and 1200x600mm Panels)
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-43-16-04	Suspension Kit for 600x600mm Ashley Panels

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	119-130 lm/W
LED Manufacturer	Honglitronic
LED Type	SMD 2835
No. of LEDs	42
Driver Manufacturer	Sochii Lighting
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	36W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP (a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	1.56Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Hours Maintained	3H
Self Test	No
Battery Pack	LiFePO4
Battery Warranty	1 Year Warranty
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

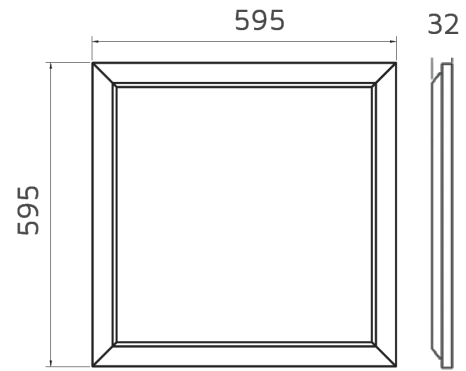

All units are in mm

Other Options

	Description
NET-43-03-60	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Standard
NET-43-03-61	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Emergency
NET-43-03-37	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Self Test Emergency
NET-43-03-62	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable - Push/DALI
NET-43-03-63	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable Emergency
NET-43-03-38	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable Self Test Emergency
NET-43-03-39	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

130
lm/W

3-IN-1 DIMMABLE DRIVER


Choose between 1-10V, Push
or DALI Dimming

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

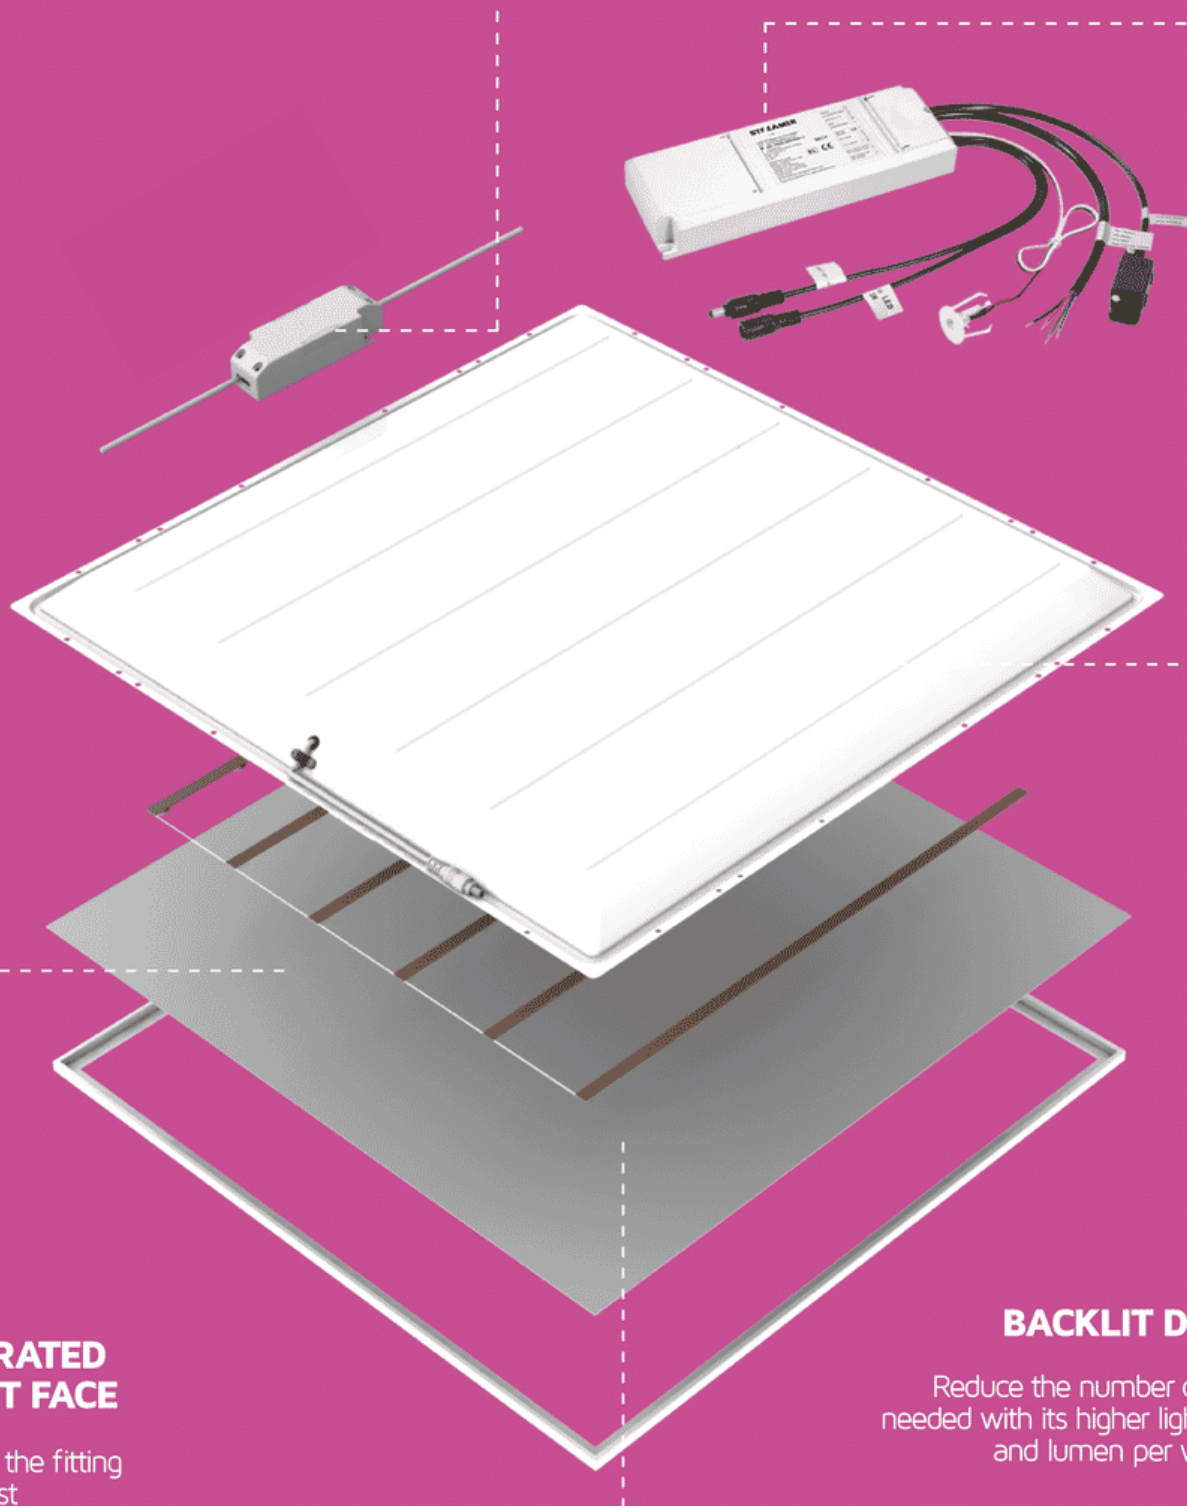

IP50 RATED FRONT FACE

Protects the fitting
from dust

BACKLIT DESIGN

Reduce the number of fittings
needed with its higher light output
and lumen per watt ratio

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply
with Building Regulations