


## ASHLEY PANEL UGR<19 4000K 600X600 36W TP(A) DIMMABLE - PUSH/DALI

NET-43-03-62



### Features & Benefits

- Merrytek 2-in-1 Dimming - Push/DALI
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Single colour temperature 4000K
- Flicker-free driver
- Backlit for a uniform light distribution

### Key Data

Power	36W
Luminous Flux	3635lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	595 x 595 x 25mm
Warranty	5 Years (Registration Required)

### Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-43-16-04	Suspension Kit for 600x600mm Ashley Panels

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	119-130 lm/W
LED Manufacturer	Honglitrronic
LED Type	SMD 2835
No. of LEDs	42
Driver Manufacturer	Kreat
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	36W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	1.56Kg
Manufacturer	Sochii Lighting
Frame Colour	White
Dimming Input Type	Merrytek 2-in-1 Dimming - DALI/Push

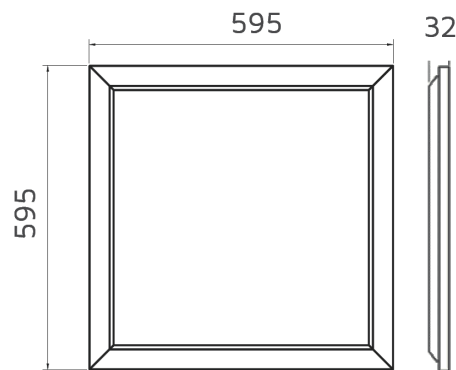

All units are in mm

## Other Options

Description	
NET-43-03-60	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Standard
NET-43-03-61	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Emergency
NET-43-03-37	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Self Test Emergency
NET-43-03-62	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable - Push/DALI
NET-43-03-63	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable Emergency
NET-43-03-38	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable Self Test Emergency
NET-43-03-39	Ashley Panel UGR<19 4000K 600x600 36W TP(a) Dimmable DALI Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

**130**  
lm/W

### 3-IN-1 DIMMABLE DRIVER


Choose between 1-10V, Push  
or DALI Dimming

*Dimmable options only*

### 3H EMERGENCY OPERATION

Ensures the fitting comes on in  
the event of a power failure

*Emergency options only*

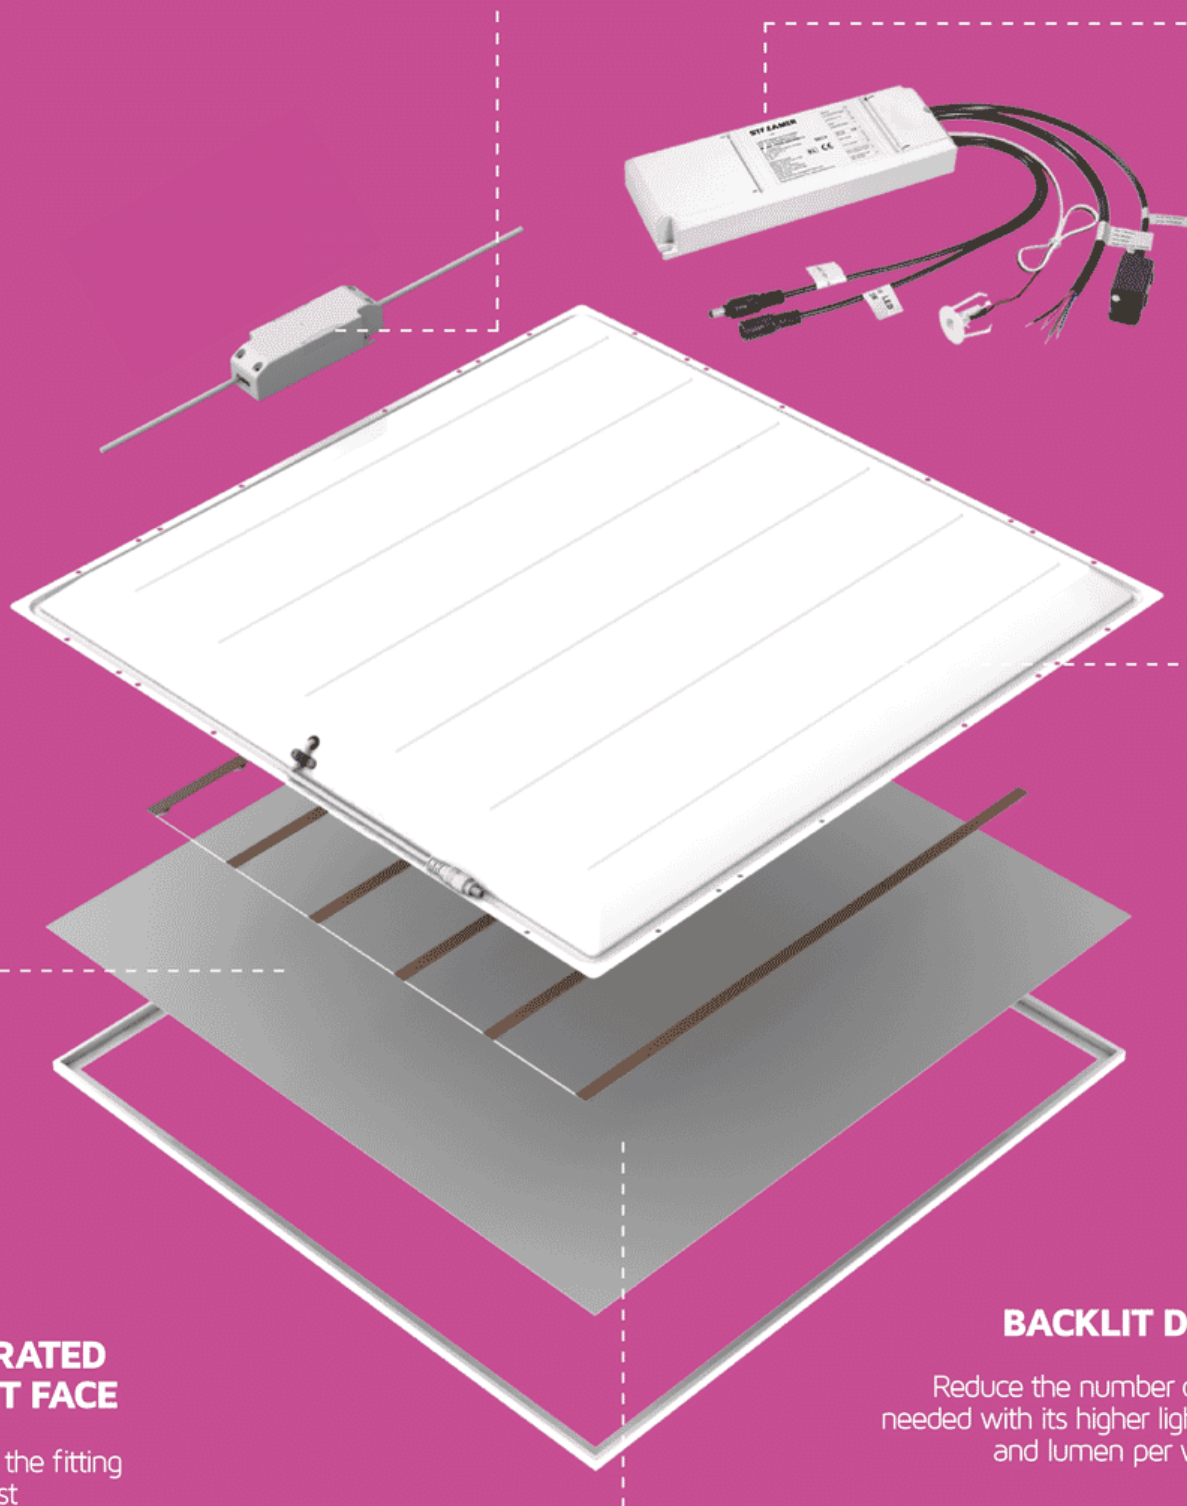

### IP50 RATED FRONT FACE

Protects the fitting  
from dust

### BACKLIT DESIGN

Reduce the number of fittings  
needed with its higher light output  
and lumen per watt ratio

### LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply  
with Building Regulations