




## ASHLEY PANEL IP65 UGR<19 TRI-COLOUR 600X600 30W TP(A) STANDARD

NET-43-03-65

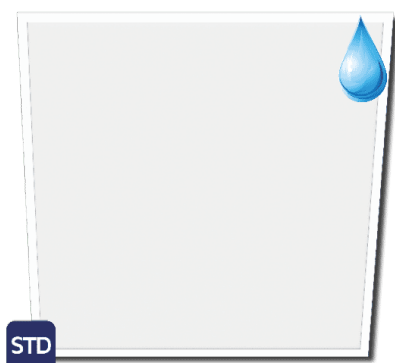

### Features & Benefits

- IP65 rated front face
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free OSRAM driver
- Backlit for a uniform light distribution

### Key Data

<b>Power</b>	30W
<b>Luminous Flux</b>	3600lm/3750lm/3650lm
<b>Colour Temperature</b>	3000K/4000K/6000K
<b>IP Rating</b>	IP65 Front/IP20 Rear
<b>Dimensions</b>	595 x 595 x 27mm
<b>Warranty</b>	5 Years (Registration Required)

### Compatible Accessories

NET-39-16-01	Recess Clips (set of 4)
NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W
NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-60-43-80	Tridonic Triac Dimmable Driver 30W/45W (600x600mm and 1200x600mm Panels)
NET-39-03-47	Panel Recessed Frame 600x600mm
NET-39-03-39	Panel Surface Box 600x600mm
NET-43-16-04	Suspension Kit for 600x600mm Ashley Panels

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	137lm/W
LED Manufacturer	Honglitrronic
LED Type	SMD 2835
No. of LEDs	42
Driver Manufacturer	OSRAM
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Weight	1.56Kg
Manufacturer	Sochii Lighting
Frame Colour	White

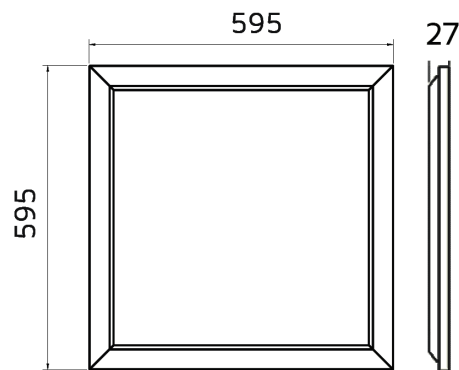

All units are in mm

## Other Options

Description	
NET-43-03-65	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Standard
NET-43-03-66	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Emergency
NET-43-03-67	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Self Test Emergency
NET-43-03-68	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable - Push/DALI
NET-43-03-69	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Emergency
NET-43-03-70	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Self Test Emergency
NET-43-03-71	Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable DALI Emergency

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

**135**  
lm/W

### 3-IN-1 DIMMABLE DRIVER

Choose between 1-10V, Push or DALI Dimming

*Dimmable options only*

### 3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

*Emergency options only*

### SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 6000K

### IP65 RATED FRONT FACE

Protects the fitting from dust and moisture

### BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

### LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

