



ASHLEY PANEL IP65 UGR<19 TRI-COLOUR 600X600 30W TP(A) EMERGENCY

NET-43-03-66



Features & Benefits

- 3H Emergency function
- IP65 rated front face
- Low glare diffuser with UGR rating <19
- TP(a) flammability-rated diffuser
- Selectable 3000K, 4000K or 6000K colour temperature
- Flicker-free OSRAM driver

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 30W |
| Luminous Flux | 3600lm/3750lm/3650lm |
| Colour Temperature | 3000K/4000K/6000K |
| IP Rating | IP65 Front/IP20 Rear |
| Dimensions | 595 x 595 x 27mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-39-16-01 | Recess Clips (set of 4) |
| NET-61-35-13 | Buckden Self Test Emergency Kit 3W for Panels and Downlights |
| NET-60-43-80 | Tridonic Triac Dimmable Driver 30W/45W (600x600mm and 1200x600mm Panels) |
| NET-39-03-47 | Panel Recessed Frame 600x600mm |
| NET-39-03-39 | Panel Surface Box 600x600mm |
| NET-43-16-04 | Suspension Kit for 600x600mm Ashley Panels |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|------------------------------|-----------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.9 |
| Luminaire Efficacy | 137lm/W |
| LED Manufacturer | Honglitrronic |
| LED Type | SMD 2835 |
| No. of LEDs | 42 |
| Driver Manufacturer | OSRAM |
| Driver Output Voltage (DC) | 30-42V |
| Total Circuit Power (W) | 30W |
| Electrical Class | 2 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable | No |
| Flicker-Free | Yes |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| Diffuser Flammability Rating | TP(a) |
| UGR Rating | Less than 19 |
| Diffuser/LGP Material | PS |
| Weight | 1.56Kg |
| Manufacturer | Sochii Lighting |
| Frame Colour | White |
| Hours Maintained | 3H |
| Self Test | No |
| Battery Pack | LiFePO4 |
| Battery Warranty | 1 Year Warranty |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |

Other Options

| Description | |
|--------------|--|
| NET-43-03-65 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Standard |
| NET-43-03-66 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Emergency |
| NET-43-03-67 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Self Test Emergency |
| NET-43-03-68 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable - Push/DALI |
| NET-43-03-69 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Emergency |
| NET-43-03-70 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable Self Test Emergency |
| NET-43-03-71 | Ashley Panel IP65 UGR<19 Tri-Colour 600x600 30W TP(a) Dimmable DALI Emergency |

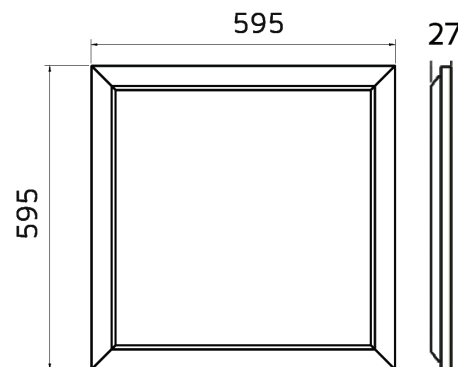

All units are in mm

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

135
lm/W

3-IN-1 DIMMABLE DRIVER

Choose between 1-10V, Push
or DALI Dimming

Dimmable options only

3H EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 6000K

IP65 RATED FRONT FACE

Protects the fitting from
dust and moisture

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply
with Building Regulations

BACKLIT DESIGN

Reduce the number of fittings
needed with its higher light output
and lumen per watt ratio

