
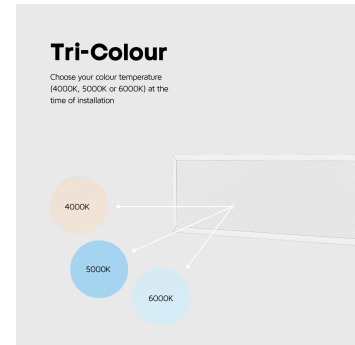


ASHLEY BACKLIT PANEL UGR<19 TRI-COLOUR TP(A) 300X600 18W

NET-43-03-78



Key Data

Power	18W
Luminous Flux	1800lm-2000lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP20
Dimensions	295 x 595 x 32mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-02	Universal LED Panel Suspension Kit
NET-39-16-03	Burgess Z Clips
NET-39-16-05	Burgess Adjustable Z Clips

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	110lm/W
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	18W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Manufacturer	Sochii Lighting
Frame Colour	White
Hours Maintained	3H
Self Test	Selectable
Battery Pack	LiFePO4
Battery Warranty	2 Year Warranty
Charge Time	24H
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

Other Options

Description	
NET-43-03-77	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 300x600 18W Standard
NET-43-03-78	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 300x600 18W Emergency/Self Test
NET-43-03-79	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 300x600 18W Dimmable one4all
NET-43-03-80	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 300x600 18W Dimmable Emergency/Self Test
NET-43-03-81	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 300x600 18W Dimmable DALI Emergency

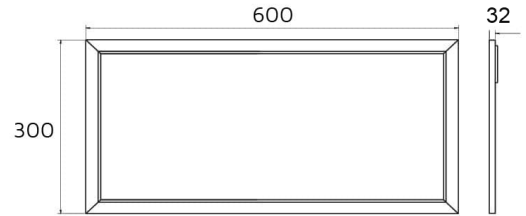

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

Up to
140
lm/W

BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 4000K, 5000K or 6000K


4K

5K

6K

TRIDONIC DRIVER AS STANDARD

Ensure reliability, durability and performance leading to long-lasting LEDs

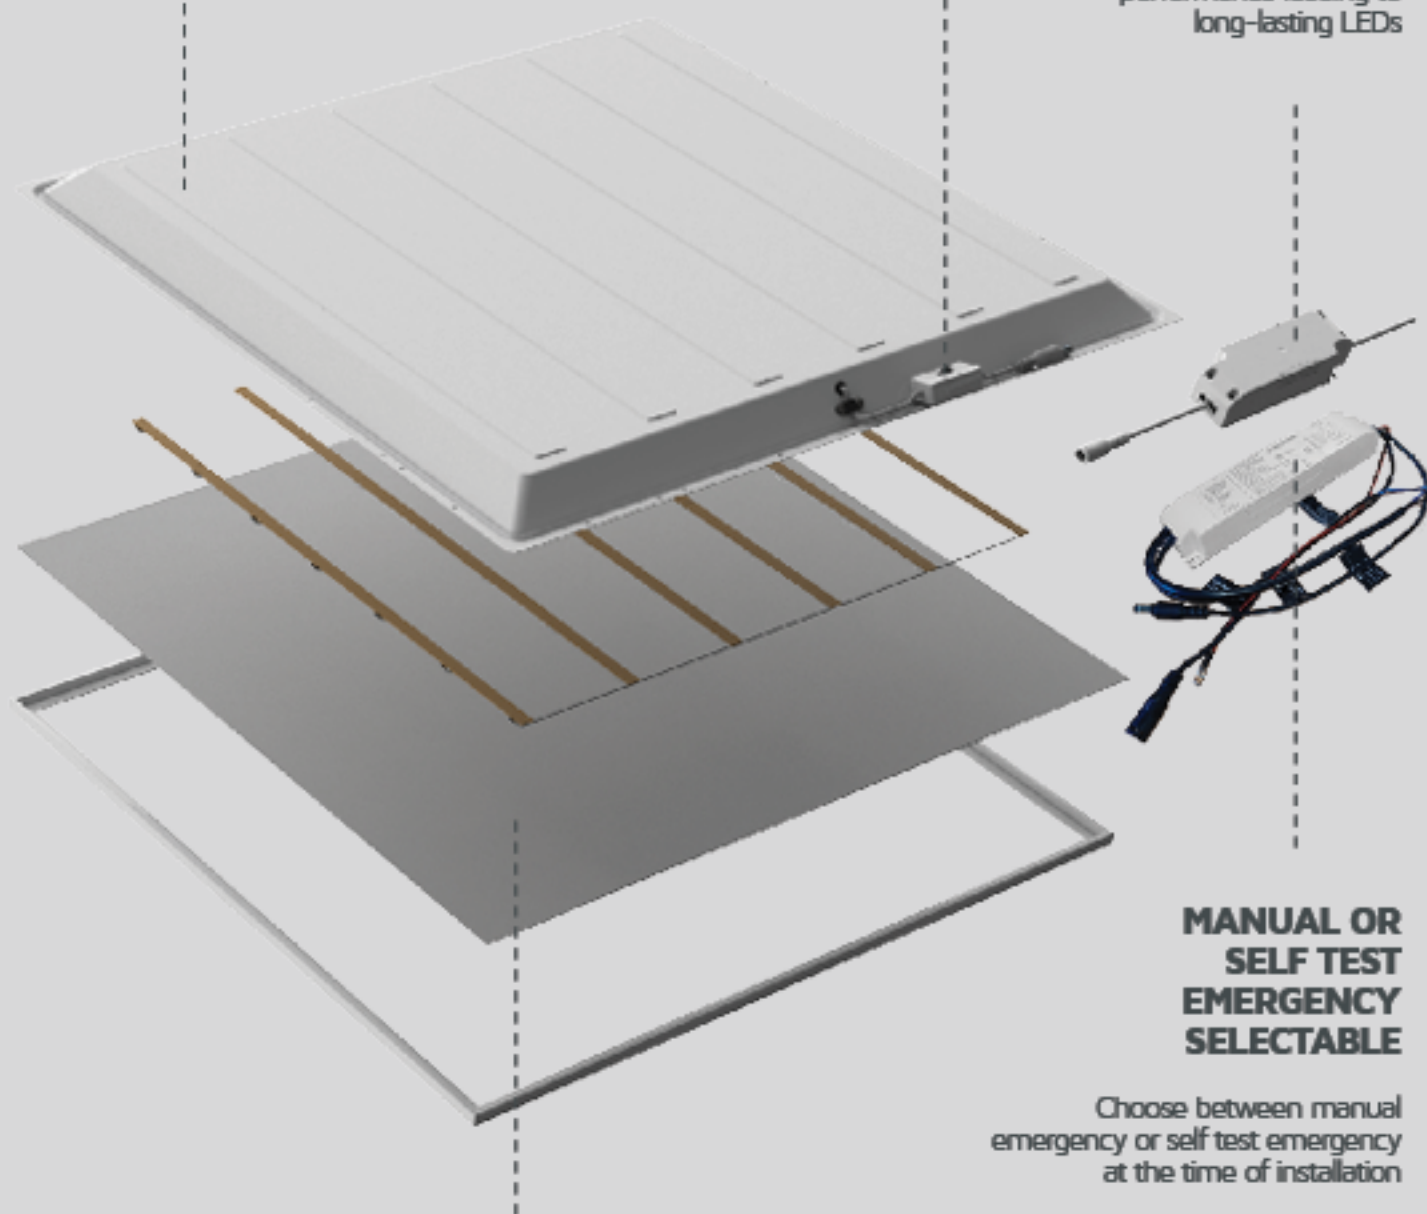

MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

Emergency options only

LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations