
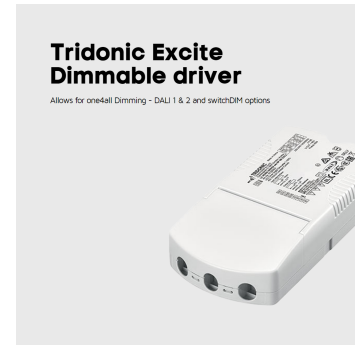


**ASHLEY BACKLIT PANEL UGR<19 TRI-COLOUR TP(A) 1200X300 30W DIMMABLE**

NET-43-03-98



**Key Data**

<b>Power</b>	30W
<b>Luminous Flux</b>	3600lm/3900lm/3600lm
<b>Colour Temperature</b>	3000K/4000K/6000K
<b>IP Rating</b>	IP20
<b>Dimensions</b>	1195 x 295 x 32mm
<b>Warranty</b>	5 Years (Registration Required)

**Compatible Accessories**

NET-46-16-02	Universal LED Panel Suspension Kit
NET-39-16-03	Burgess Z Clips
NET-39-16-05	Burgess Adjustable Z Clips

**NET LED Lighting**

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/W
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	30-42V
Total Circuit Power (W)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	Less than 19
Diffuser/LGP Material	PS
Manufacturer	Sochii Lighting
Frame Colour	White
Hours Maintained	3H
Self Test	Selectable
Battery Pack	LiFePO4
Battery Warranty	2 Year Warranty
Charge Time	24H
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
Emergency Kit	3 Year Warranty
Emergency Operation	>3H

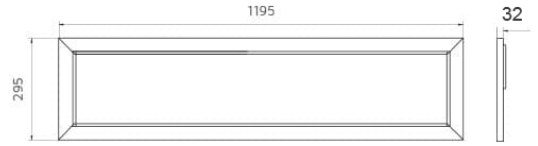

Emergency Kit  
Other Options  
Emergency Operation

Description	
NET-43-03-95	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 1200x300 30W Standard
NET-43-03-96	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 1200x300 30W Emergency/Self Test
NET-43-03-97	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 1200x300 30W Dimmable one4all
NET-43-03-98	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 1200x300 30W Dimmable Emergency/Self Test
NET-43-03-99	Ashley Backlit Panel UGR<19 Tri-Colour TP(a) 1200x300 30W Dimmable DALI Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

Up to  
**140**  
lm/W

## BACKLIT DESIGN

Reduce the number of fittings needed with its higher light output and lumen per watt ratio

## SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 4000K, 5000K or 6000K

4K

5K

6K

## WIRELESS CONTROL

Control the panel remotely via smartphone or tablet with its Bluetooth Dimmable Driver

*Bluetooth options only*

## TRIDONIC DIMMABLE DRIVER

Customise lighting levels and reduce energy consumption

*Dimmable options only*

## MANUAL OR SELF TEST EMERGENCY SELECTABLE

Choose between manual emergency or self test emergency at the time of installation

*Emergency options only*

## LOW GLARE UGR<19 AND TP(A) FLAMMABILITY RATED DIFFUSER

Reduce headaches and comply with Building Regulations

