

CAXTON DOWNLIGHT TRI-COLOUR 4" 7W TP(A) DIMMABLE EMERGENCY

NET-49-05-22



DIM
EMG

Tridonic Excite Dimmable driver

Allows for one4all Dimming - DALI 1 & 2 and switchDIM options



3 Hour Emergency operation

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure - can be Self Test Emergency or standard 3H Emergency



Features & Benefits

- 3H Emergency function
- Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
- Ø120-130mm cut out size
- TP(α) flammability-rated diffuser
- Selectable 3000K, 4000K or 5500K colour temperature
- Shatterproof polycarbonate diffuser

Key Data

Power	7W
Luminous Flux	700lm/750lm/700lm
Colour Temperature	3000K/4000K/5500K
IP Rating	IP65 Front/IP20 Rear
Dimensions	Ø140 x 45mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-35-13	Buckden Self Test Emergency Kit 3W for Panels and Downlights
NET-42-43-24	DALI Dimmer Switch
NET-42-43-05	Merrytek Ceiling Mount Microwave Sensor

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.5
Luminaire Efficacy	105lm/W
LED Manufacturer	Hongliitronic
LED Type	SMD 2835
No. of LEDs	60
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	23-40V
Total Circuit Power (W)	7W
Electrical Class	3
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
Diffuser Flammability Rating	TP(a)
UGR Rating	More than 19
Weight	0.37Kg
Manufacturer	CREP Optoelectronics
Hours Maintained	3H
Luminous Flux Factor	43%
Self Test	No
Cut-Out Size	ø120-130mm
Housing Colour	White
Housing Material	Aluminium
Battery Pack	LiFePO4 3.2V 4.5Ah
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)

Other Options

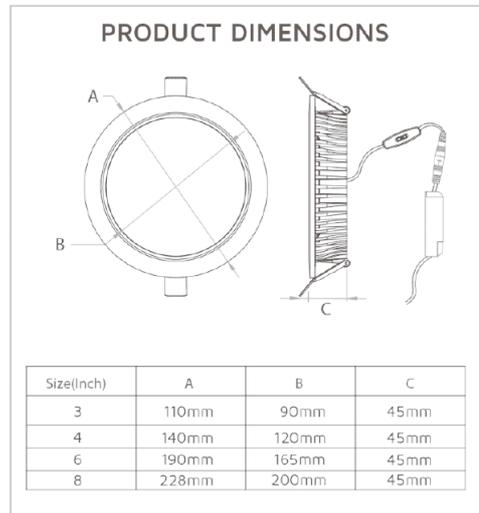

Description		
NET-49-05-19	>3H	Caxton Downlight Tri-Colour 4" 7W TP(a) Standard
NET-49-05-17	Streamer	Caxton Downlight Tri-Colour 4" 7W TP(a) Emergency
NET-49-05-20		Caxton Downlight Tri-Colour 4" 7W TP(a) Self Test Emergency
NET-49-05-21		Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable one4all
NET-49-05-22		Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable Emergency
NET-49-05-23		Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable Self Test Emergency
NET-49-05-24		Caxton Downlight Tri-Colour 4" 7W TP(a) Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Ø90-210MM CUT-OUT SIZES

Available in 3", 4", 6" and 8", these downlights are designed to fit most existing holes

STAINLESS STEEL RETAINING CLIPS

Quick and simple installation with no need for additional tools



TRIDONIC DIMMABLE DRIVER


Customise lighting levels and reduce electricity consumption

Dimmable options only



TP(A) FLAMMABILITY RATED DIFFUSER

Comply with Building Regulations and prevent flaming particles

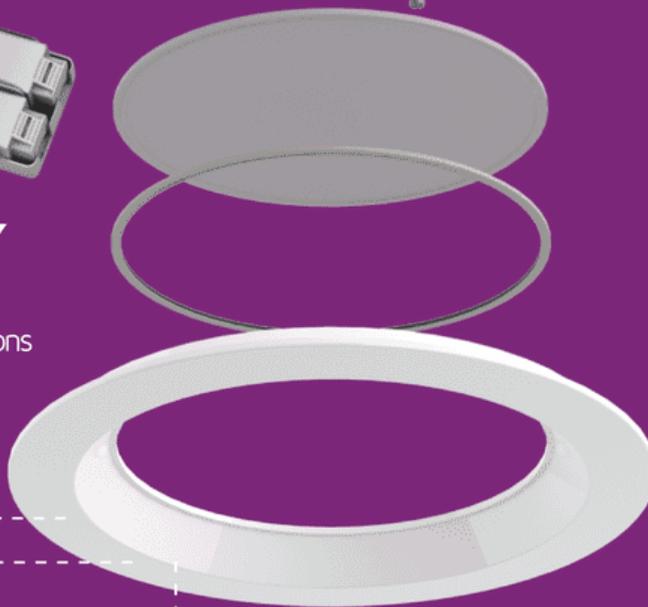

IP65 RATED FASCIA

Protect the downlight from water and dust

SHATTERPROOF POLYCARBONATE DIFFUSER

Designed to prevent the diffuser shattering into small, indistinct pieces

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 5500K

3K

4K

5.5K

3H EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only

