



HARLTON LOW BAY 5700K 120W PIR SENSOR EMERGENCY (UP TO 6M)

NET-51-12-84

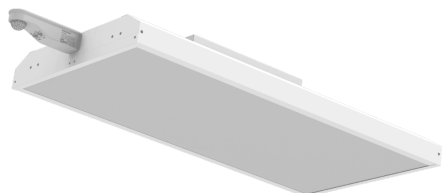


External PIR Sensor up to 6m

Save energy costs with a fitting that only lights up the warehouse when heat signatures are detected



High power 20W Emergency function

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure



Features & Benefits

- High Power 20W Emergency function
- PIR Sensor with up to 6m detection range
- Recommended for mounting at height between 4-8m
- Includes V-Bracket for suspension
- Tridonic driver as standard
- 5700K colour temperature

Key Data

Power	120W
Luminous Flux	16000lm
Colour Temperature	5700K
IP Rating	IP20
Dimensions	690 x 320 x 52.6mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-08	Universal LED Low Bay Suspension Kit
--------------	--------------------------------------

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	130lm/w
LED Manufacturer	Runlite
LED Type	SMD 2835
No. of LEDs	756
Driver Manufacturer	Tridonic Advanced Series
Total Circuit Power (w)	120W +/- 5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-0°C to +40°C
Lifespan LM80	80,000 Hours
UGR Rating	>22
Weight	2.5Kg
Manufacturer	Sealite Co. Ltd
Hours Maintained	3H
Luminous Flux Factor	16%
Lux Levels	3-2000lux (adjustable)
Max. Detection Distance	6m
Self Test	No
Housing Colour	White
Housing Material	Aluminium
Battery Pack	LiFePO4
Detection Angle	360°
Diffuser Material	Polycarbonate
Dimming Range	50%, 75% or 100%
Duration	10s - 30min

Other Options

Description		
NET-51-12-96 Emergency Operation	>3H	Harlton Low Bay 5700K 120W Standard
NET-51-12-86 Emergency Pack	Streamer	Harlton Low Bay 5700K 120W Emergency
NET-51-12-98 Sensor Manufacturer	Sealite Co. Ltd.	Harlton Low Bay 5700K 120W Microwave Sensor
NET-51-12-99 Sensor IP Rating	IP65	Harlton Low Bay 5700K 120W Microwave Sensor Emergency
NET-51-12-84 Standby Dimming Level	50%, 75% or 100%	Harlton Low Bay 5700K 120W PIR Sensor (up to 6m)
NET-51-12-84		Harlton Low Bay 5700K 120W PIR Sensor Emergency (up to 6m)

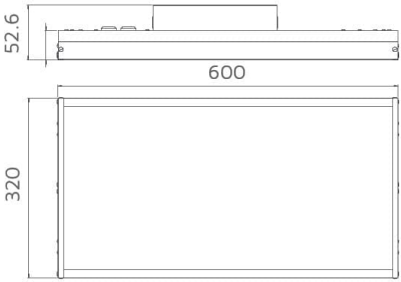

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

**20W HIGH OUTPUT
EMERGENCY OPERATION**

Ensures the fitting comes on in the event of a power failure

Emergency options only

**MICROWAVE SENSOR AND
PIR SENSOR OPTIONS
AVAILABLE**

Choose between a Microwave Sensor with 0, 10 or 25% Standby Mode with 15m detection range, or a PIR Sensor with 6m detection range

**5700K COLOUR
TEMPERATURE**

Bright and crisp light best used for industrial spaces

5.7K