

ASHLEY SLIM DOWNLIGHT 4000K 4" 10W EMERGENCY

NET-53-05-90



3H

**3 Hour
Emergency
operation**

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure - can be Self Test Emergency or standard 3H Emergency



**3H LiFePO4
Emergency Kit**

Requires little maintenance and ensures a long lifespan



Features & Benefits

- 3H Emergency function
- Ø135mm cut out size
- Slim, low profile design
- Stainless steel retaining clips
- Single colour temperature 4000K
- 10mm depth

Key Data

| | |
|---------------------------|-------------|
| Power | 10W |
| Luminous Flux | 900lm |
| Colour Temperature | 4000K |
| IP Rating | IP20 |
| Dimensions | Ø145 x 10mm |
| Warranty | 3 Years |

Compatible Accessories

| | |
|--------------|---|
| NET-42-43-26 | Merrytek Dimming Driver up to 10W |
| NET-42-43-05 | Merrytek Ceiling Mount Microwave Sensor |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|--------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.5 |
| Luminaire Efficacy | 90lm/W |
| LED Manufacturer | MTC |
| LED Type | SMD 2835 |
| No. of LEDs | 60 |
| Driver Manufacturer | Hooger Electronics |
| Driver Output Voltage (DC) | 22-42V |
| Total Circuit Power (W) | 10W |
| Electrical Class | 2 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable | Optional Upgrade |
| Flicker-Free | Yes |
| Operating Temp. | 0°C to +35°C |
| Lifespan LM80 | 35,000 Hours |
| UGR Rating | 27 |
| Weight | 0.29Kg |
| Manufacturer | Kingsway Lighting |
| Hours Maintained | 3H |
| Luminous Flux Factor | 30% |
| Self Test | No |
| Cut-Out Size | Ø135mm |
| Housing Colour | White |
| Housing Material | Aluminium |
| Battery Pack | LiFePO4 3.2V 4.5Ah |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |
| Emergency Pack | Streamer |

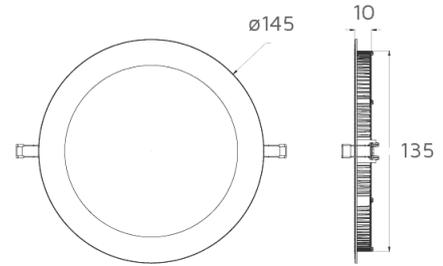

All units are in mm

Other Options

| Description | |
|--------------|--|
| NET-53-05-81 | Ashley Slim Downlight 4000K 4" 10W Standard |
| NET-53-05-90 | Ashley Slim Downlight 4000K 4" 10W Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

10MM DEPTH

Essential for shallow ceiling voids

STAINLESS STEEL RETAINING CLIPS

Quick and simple installation with no need for additional tools



Ø135-210MM CUT-OUT SIZE

Retrofit over an existing cut-out from anywhere between Ø135mm and Ø210mm

4K

4000K COLOUR TEMPERATURE

Create a focused environment perfect for offices and commercial spaces

