

## ASHLEY SLIM DOWNLIGHT 4000K 6" 15W EMERGENCY

NET-53-05-91



### Features & Benefits

- 3H Emergency function
- Ø175mm cut out size
- Slim, low profile design
- Stainless steel retaining clips
- Single colour temperature 4000K
- 10mm depth

### Key Data

Power	15W
Luminous Flux	1350lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	Ø190 x 10mm
Warranty	3 Years

### Compatible Accessories

NET-42-43-05	Merrytek Ceiling Mount Microwave Sensor
--------------	---

#### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)




**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.5
Luminaire Efficacy	90lm/W
LED Manufacturer	MTC
LED Type	SMD 2835
No. of LEDs	89
Driver Manufacturer	Hooger Electronics
Driver Output Voltage (DC)	22-42V
Total Circuit Power (W)	15W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Flicker-Free	Yes
Operating Temp.	0°C to +35°C
Lifespan LM80	35,000 Hours
UGR Rating	27
Weight	0.40Kg
Manufacturer	Kingsway Lighting
Hours Maintained	3H
Luminous Flux Factor	16.5%
Self Test	No
Cut-Out Size	Ø175mm
Housing Colour	White
Housing Material	Aluminium
Battery Pack	LiFePO4 3.2V 4.5Ah
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

Other Options

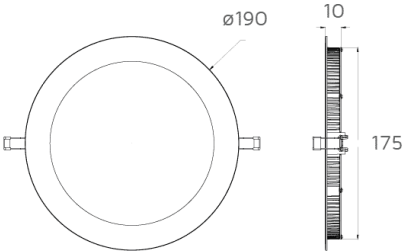

All units are in mm

Description	
NET-53-05-83	Ashley Slim Downlight 4000K 6" 15W Standard
NET-53-05-91	Ashley Slim Downlight 4000K 6" 15W Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM  
FOR NEXT DAY DELIVERY

## 10MM DEPTH

Essential for shallow ceiling voids

## STAINLESS STEEL RETAINING CLIPS


Quick and simple installation with no need for additional tools



4K

## 4000K COLOUR TEMPERATURE

Create a focused environment perfect for offices and commercial spaces

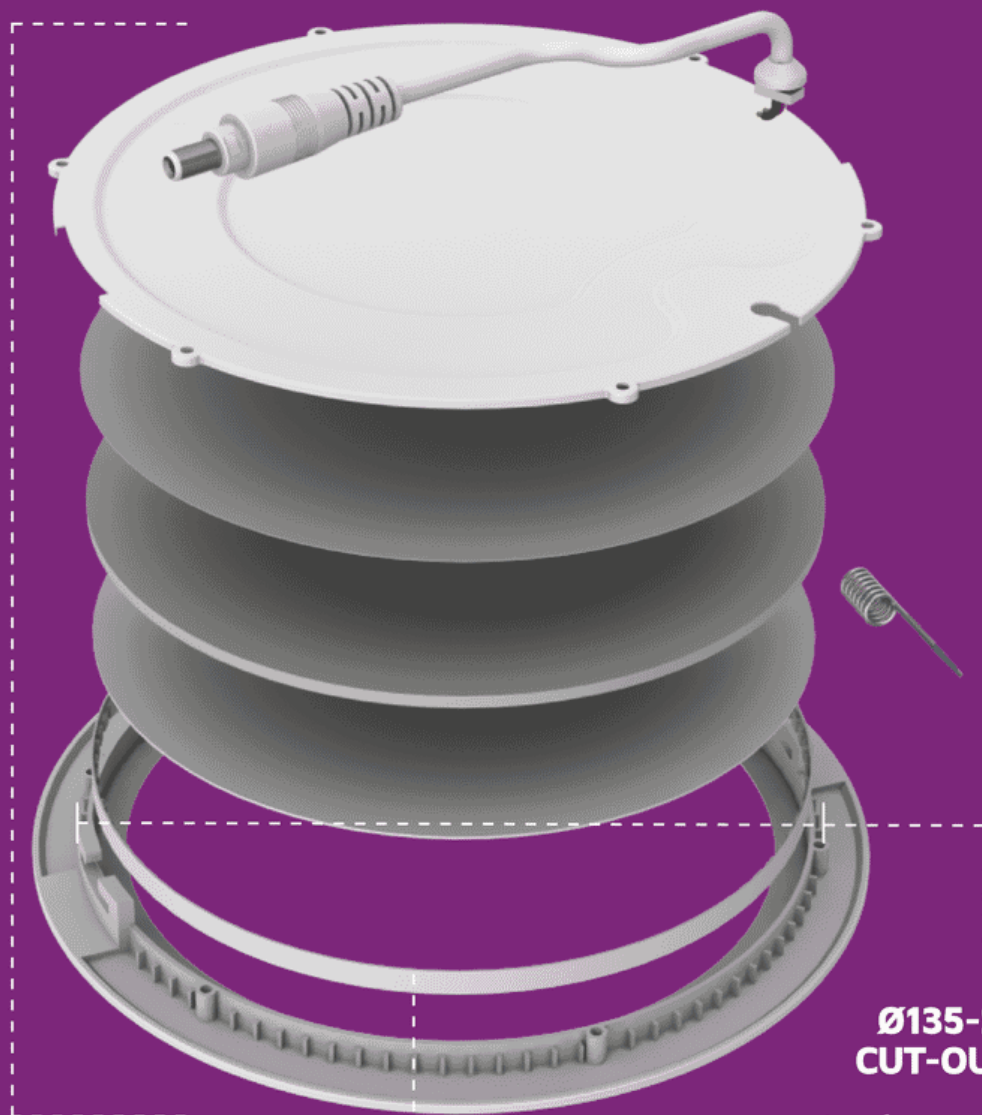

## Ø135-210MM CUT-OUT SIZE

Retrofit over an existing cut-out from anywhere between Ø135mm and Ø210mm