


**ELY DOME HEAD BOLLARD TRI-COLOUR 22W STANDARD**

NET-53-14-02

STD

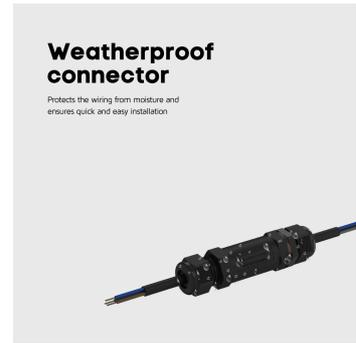

**Features & Benefits**

- Selectable 3000K, 4000K or 6000K colour temperature
- White reflector helps distribute the light evenly and reduce glare
- Weatherproof connector protects the wiring from water and moisture
- IK09 rated housing
- Optional Anchor Mounting Kit available

**Key Data**

|                           |                   |
|---------------------------|-------------------|
| <b>Power</b>              | 22W               |
| <b>Luminous Flux</b>      | 2000lm            |
| <b>Colour Temperature</b> | 3000K/4000K/6000K |
| <b>IP Rating</b>          | IP65              |
| <b>IK Rating</b>          | IK08              |
| <b>Dimensions</b>         | Ø160 x 1000mm     |
| <b>Warranty</b>           | 3 Years           |

**Compatible Accessories**

|              |                          |
|--------------|--------------------------|
| NET-53-14-08 | Root J Bolt Mounting Kit |
|--------------|--------------------------|

**NET LED Lighting**

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

|                            |                        |
|----------------------------|------------------------|
| Input Voltage (AC)         | 220-240V               |
| Power Factor               | >0.90                  |
| Luminaire Efficacy         | 90-100lm/W             |
| LED Manufacturer           | Duris                  |
| LED Type                   | SMD 2835               |
| Driver Manufacturer        | BOKE                   |
| Driver Output Voltage (DC) | 28-38V                 |
| Total Circuit Power (W)    | 22W                    |
| Electrical Class           | 1                      |
| Colour Rendering           | >80 CRI                |
| Lamp Viewing Angle         | 180°                   |
| Dimmable                   | No                     |
| Operating Temp.            | -25°C to +40°C         |
| Lifespan LM80              | 50,000 Hours           |
| Weight                     | 5.5Kg                  |
| Manufacturer               | Kingsway Lighting Ltd. |
| Photocell Compatible       | No                     |
| Housing Colour             | Black                  |
| Housing Material           | Aluminium              |
| Diffuser Material          | Acrylic                |

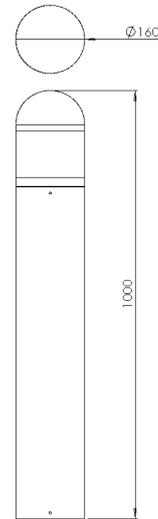

## Other Options

| Description  |  |
|--------------|--|
| NET-53-14-02 | Ely Dome Head Bollard Tri-Colour 22W Standard            |
| NET-53-14-04 | Ely Dome Head Bollard Tri-Colour 22W Photocell           |
| NET-53-14-03 | Ely Dome Head Bollard Tri-Colour 22W Emergency           |
| NET-53-14-05 | Ely Dome Head Bollard Tri-Colour 22W Photocell Emergency |

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY



### **DOMED HEAD OR LOUVRE REFLECTOR AVAILABLE**

Choose between diffused, ambient lighting with a Dome Head or directed, controlled lighting with the Louvre Reflector

### **WHITE REFLECTOR**

Help distribute the light evenly and reduce glare

### **WEATHERPROOF CONNECTOR**

Protect your wiring from water and moisture



### **SELECTABLE COLOUR TEMPERATURE**

Choose your colour temperature 3000K, 4000K or 6000K

### **3H EMERGENCY OPERATION**

Ensures the fitting comes on in the event of a power failure

*Emergency options only*

### **DUSK TO DAWN FUNCTION**

Detects ambient light levels and adjusts the light accordingly

*Photocell options only*

### **IK10 RATED HOUSING**

Protect your bollard from impact with its durable, aluminium outer sleeve