


ELY LOUVRE HEAD BOLLARD TRI-COLOUR 22W STANDARD

NET-53-14-06

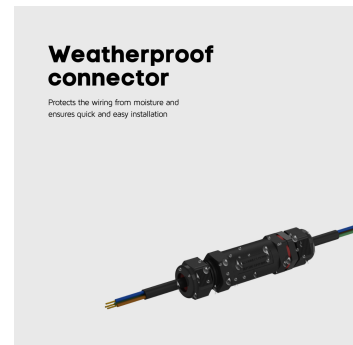

Features & Benefits

- Selectable 3000K, 4000K or 6000K colour temperature
- White reflector helps distribute the light evenly and reduce glare
- Weatherproof connector protects the wiring from water and moisture
- IK09 rated housing
- Optional Anchor Mounting Kit available

Key Data

Power	22W
Luminous Flux	2000lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP65
IK Rating	IK08
Dimensions	Ø160 x 1000mm
Warranty	3 Years

Compatible Accessories

NET-53-14-08	Root J Bolt Mounting Kit
--------------	--------------------------

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.90
Luminaire Efficacy	90-100lm/W
LED Manufacturer	Duris
LED Type	SMD 2835
Driver Manufacturer	BOKE
Driver Output Voltage (DC)	28-38V
Total Circuit Power (W)	22W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	180°
Dimmable	No
Operating Temp.	-25°C to +40°C
Lifespan LM80	50,000 Hours
Weight	5.8Kg
Manufacturer	Kingsway Lighting Ltd.
Photocell Compatible	No
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Acrylic

Other Options

Description	
NET-53-14-06	Ely Louvre Head Bollard Tri-Colour 22W Standard
NET-53-14-11	Ely Louvre Head Bollard Tri-Colour 22W Photocell
NET-53-14-10	Ely Louvre Head Bollard Tri-Colour 22W Emergency
NET-53-14-12	Ely Louvre Head Bollard Tri-Colour 22W Photocell Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY