



## CARLTON T5 TUBE 4000K (4FT) 11W

NET-55-01-10

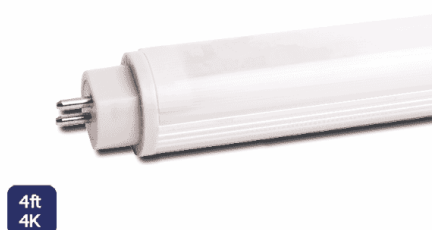


### 2 colour temperatures available

4000K and 5500K colour temperatures available for a variety of applications



### Rotatable end caps

Direct the light exactly where it's needed



## Features & Benefits

- Rotatable end caps
- Single colour temperature 4000K

## Key Data

Power	11W
Luminous Flux	1540lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	1163.2 x 22mm
Warranty	5 Years (Registration Required)

## Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)




**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	85-265V
Power Factor	>0.95
Luminaire Efficacy	130lm/W
LED Manufacturer	Sanan
LED Type	SMD 2835
Driver Manufacturer	Wiscoon Tech Co. Ltd
Driver Output Voltage (DC)	50-80V
Total Circuit Power (W)	11W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Weight	0.28Kg
Manufacturer	Wiscoon Tech Co. Ltd.
Fire Rating	V2
Luminous Flux Factor	36.36%
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate

## PRODUCT DIMENSIONS

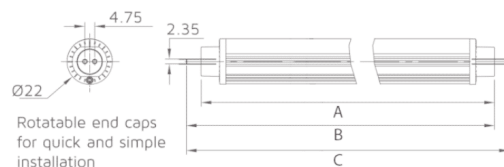

All dimensions are in mm	A	B	C
NET-55-01-03	288	295	302
NET-55-01-05	549	556	563
NET-55-01-07	849	856	863
NET-55-01-08	849	856	863
NET-55-01-09	1149	1156	1163
NET-55-01-11	1449	1456	1463
NET-55-01-10	1149	1156	1163
NET-55-01-12	1449	1456	1463

## Other Options

Description	
NET-55-01-03	Carlton T5 Tube 5500K (1ft) 4W
NET-55-01-05	Carlton T5 Tube 5500K (2ft) 8W
NET-55-01-07	Carlton T5 Tube 5500K (3ft) 9W
NET-55-01-09	Carlton T5 Tube 5500K (4ft) 11W
NET-55-01-11	Carlton T5 Tube 5500K (5ft) 14W
NET-55-01-10	Carlton T5 Tube 4000K (4ft) 11W
NET-55-01-12	Carlton T5 Tube 4000K (5ft) 14W
NET-55-01-08	Carlton T5 Tube 4000K (3ft) 9W

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

**135**  
lm/W

3K

4K

5.5K

**3000K, 4000K AND  
5500K COLOUR  
TEMPERATURES  
AVAILABLE**

Can be used for a variety of  
applications from commercial  
and retail spaces to residential  
environments

4K

5.5K

**4000K AND  
5500K COLOUR  
TEMPERATURES  
AVAILABLE**

Can be used for a variety of  
applications from commercial  
and retail spaces to residential  
environments

T8

T5

**DALI DIMMABLE  
DRIVER  
OPTIONS  
AVAILABLE**

Customise lighting levels  
and reduce electricity  
consumption

*DALI options only*

**ROTATABLE  
END CAPS**

Direct the light exactly  
where it's needed

