


## CARLTON T5 DALI TUBE 4000K (4FT) 16W (INC. DRIVER 66V @ 200MA)

NET-55-01-16




### DALI Dimmable driver included

Control the brightness of your fitting via a DALI rotary switch or DALI system



### Rotatable end caps

Direct the light exactly where it's needed



### Key Data

Power	16W
Luminous Flux	2200lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	1163.2 x 22mm
Warranty	5 Years (Registration Required)

### Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	85-265V
Power Factor	>0.95
LED Manufacturer	Sanan
LED Type	SMD 2835
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	66V
Total Circuit Power (W)	16W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Manufacturer	Wiscoon Tech Co. Ltd.
Fire Rating	V2
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate
Dimming Input Type	DALI

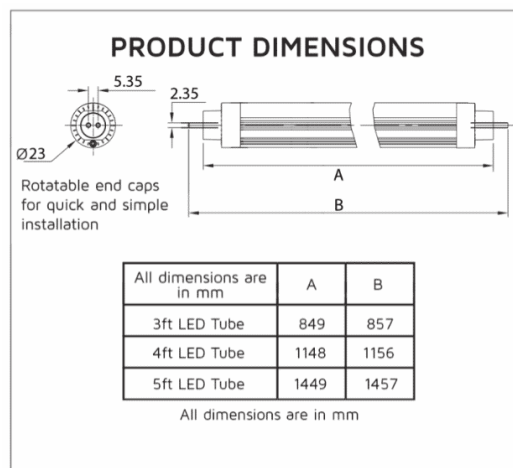

## Other Options

Description	
NET-55-01-14	Carlton T5 DALI Tube 4000K (3ft) 12W (inc. Driver 66V @ 150mA)
NET-55-01-02	Carlton T5 DALI Tube 4000K (3ft) 12W (exc. Driver)
NET-55-01-16	Carlton T5 DALI Tube 4000K (4ft) 16W (inc. Driver 66V @ 200mA)
NET-55-01-04	Carlton T5 DALI Tube 4000K (4ft) 16W (exc. Driver)
NET-55-01-18	Carlton T5 DALI Tube 4000K (5ft) 20W (inc. Driver 66V @ 250mA)
NET-55-01-06	Carlton T5 DALI Tube 4000K (5ft) 20W (exc. Driver)

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

**135**  
lm/W

3K

4K

5.5K

**3000K, 4000K AND  
5500K COLOUR  
TEMPERATURES  
AVAILABLE**

Can be used for a variety of  
applications from commercial  
and retail spaces to residential  
environments

4K

5.5K

**4000K AND  
5500K COLOUR  
TEMPERATURES  
AVAILABLE**

Can be used for a variety of  
applications from commercial  
and retail spaces to residential  
environments

T8

T5

**DALI DIMMABLE  
DRIVER  
OPTIONS  
AVAILABLE**

Customise lighting levels  
and reduce electricity  
consumption

*DALI options only*

**ROTATABLE  
END CAPS**

Direct the light exactly  
where it's needed

