



CARLTON T5 DALI TUBE 4000K (5FT) 20W (INC. DRIVER 66V @ 250MA)

NET-55-01-18

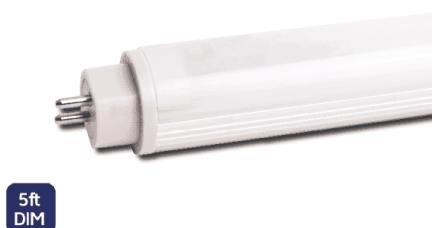

Key Data

Power	20W
Luminous Flux	2600lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	1463.2 x 22mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	85-265V
Power Factor	>0.95
LED Manufacturer	Sanan
LED Type	SMD 2835
Driver Manufacturer	Tridonic
Driver Output Voltage (DC)	66V
Total Circuit Power (W)	20W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Yes
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Manufacturer	Wiscoon Tech Co. Ltd.
Fire Rating	V2
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate
Dimming Input Type	DALI

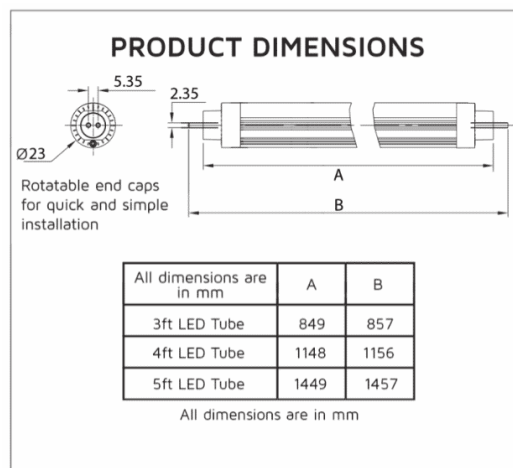

Other Options

Description	
NET-55-01-14	Carlton T5 DALI Tube 4000K (3ft) 12W (inc. Driver 66V @ 150mA)
NET-55-01-02	Carlton T5 DALI Tube 4000K (3ft) 12W (exc. Driver)
NET-55-01-16	Carlton T5 DALI Tube 4000K (4ft) 16W (inc. Driver 66V @ 200mA)
NET-55-01-04	Carlton T5 DALI Tube 4000K (4ft) 16W (exc. Driver)
NET-55-01-18	Carlton T5 DALI Tube 4000K (5ft) 20W (inc. Driver 66V @ 250mA)
NET-55-01-06	Carlton T5 DALI Tube 4000K (5ft) 20W (exc. Driver)

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

135
lm/W

3K

4K

5.5K

**3000K, 4000K AND
5500K COLOUR
TEMPERATURES
AVAILABLE**

Can be used for a variety of
applications from commercial
and retail spaces to residential
environments

4K

5.5K

**4000K AND
5500K COLOUR
TEMPERATURES
AVAILABLE**

Can be used for a variety of
applications from commercial
and retail spaces to residential
environments

T8

T5

**DALI DIMMABLE
DRIVER
OPTIONS
AVAILABLE**

Customise lighting levels
and reduce electricity
consumption

DALI options only

**ROTATABLE
END CAPS**

Direct the light exactly
where it's needed

