


CARLTON T8 TUBE 5500K 900MM (3FT) 9W


NET-55-02-02

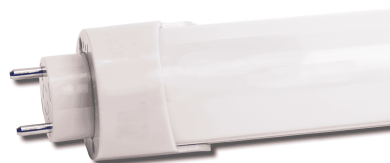

3ft

Rotatable end caps

Direct the light exactly where it's needed



Need an Emergency option?

Optional 3H Emergency and DALI Emergency Kits are available



Features & Benefits

- Rotatable end caps
- Single colour temperature 5500K

Key Data

Power	9W
Luminous Flux	1220lm
Colour Temperature	5500K
IP Rating	IP20
Dimensions	908.8 x 28mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-33-01	Streamer 3H Emergency Kit 4.5W
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-55-16-02	LED Tube Replacement Starter

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	85-265V
Power Factor	>0.95
Luminaire Efficacy	130lm/W
LED Manufacturer	Sanan
LED Type	SMD 2835
Driver Manufacturer	Wiscoon Tech Co. Ltd
Driver Output Voltage (DC)	50-80V
Total Circuit Power (w)	9W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	22
Weight	0.26Kg
Manufacturer	Wiscoon Tech Co. Ltd.
Fire Rating	V2
Luminous Flux Factor	44.44%
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	Polycarbonate



Other Options

Description	
NET-55-02-01	Carlton T8 Tube 5500K 600mm (2ft) 8W
NET-55-02-02	Carlton T8 Tube 5500K 900mm (3ft) 9W
NET-55-02-03	Carlton T8 Tube 5500K 1200mm (4ft) 15W
NET-55-02-13	Carlton T8 Tube 3000K 1500mm (5ft) 16W
NET-55-02-04	Carlton T8 Tube 5500K 1500mm (5ft) 16W
NET-55-02-15	Carlton T8 Tube 3000K 1800mm (6ft) 22W
NET-55-02-05	Carlton T8 Tube 5500K 1800mm (6ft) 22W
NET-55-02-07	Carlton T8 Tube 4000K 1500mm (5ft) 16W
NET-55-02-09	Carlton T8 Tube 4000K 1800mm (6ft) 22W

NET LED Lighting
Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

135
lm/W

3K

4K

5.5K

**3000K, 4000K AND
5500K COLOUR
TEMPERATURES
AVAILABLE**

Can be used for a variety of
applications from commercial
and retail spaces to residential
environments

4K

5.5K

**4000K AND
5500K COLOUR
TEMPERATURES
AVAILABLE**

Can be used for a variety of
applications from commercial
and retail spaces to residential
environments

T8

T5

**DALI DIMMABLE
DRIVER
OPTIONS
AVAILABLE**

Customise lighting levels
and reduce electricity
consumption

DALI options only

**ROTATABLE
END CAPS**

Direct the light exactly
where it's needed

