

KINGSTON DOWNLIGHT UGR<19 4000K 6" 21W DIMMABLE EMERGENCY

NET-60-05-09



DIM 3H

3 Hour Emergency operation

The integral Emergency Battery ensures the fitting stays on in the event of an emergency or power failure - can be Self Test Emergency or standard 3H Emergency



Tridonic Excite Dimmable driver

Allows for one4all Dimming - DALI 1 & 2 and switchDIM options



Features & Benefits

- Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
- Choose between 3H Emergency or Self Test Emergency function
- Low glare diffuser with UGR<19
- Ø145-158mm cut out size
- Single colour temperature 4000K

Key Data

Power	21W
Luminous Flux	2210lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	ø163 x 86 x 78mm
Warranty	5 Years (Registration Required)

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V AC
Power Factor	0.95
Luminaire Efficacy	109lm/w
LED Manufacturer	Tridonic
No. of LEDs	40
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	40V
Total Circuit Power (w)	20W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	60°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	0°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 19
Weight	0.157Kg
Manufacturer	Tridonic
Hours Maintained	3H
Self Test	Optional
Cut-Out Size	ø145-158mm
Housing Colour	White
Housing Material	Aluminium
Battery Pack	LiFePO4 3.2V 2000Ah
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
Emergency Kit	3 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer

Other Options

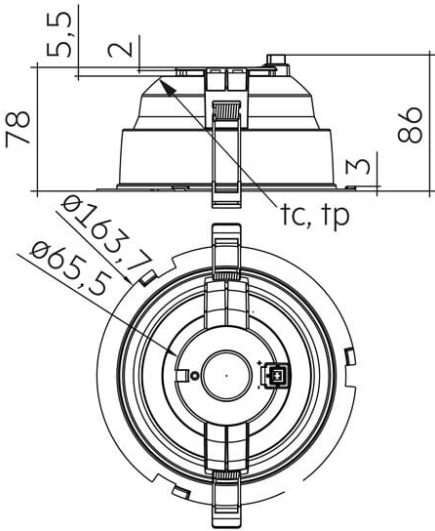

Description	
NET-60-05-06	Kingston Downlight UGR<19 4000K 6" 21W Standard
NET-60-05-07	Kingston Downlight UGR<19 4000K 6" 21W Emergency
NET-60-05-08	Kingston Downlight UGR<19 4000K 6" 21W Dimmable one4all
NET-60-05-09	Kingston Downlight UGR<19 4000K 6" 21W Dimmable Emergency
NET-60-05-10	Kingston Downlight UGR<19 4000K 6" 21W Dimmable DALI Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

STAINLESS STEEL RETAINING CLIPS

Quick and simple installation
with no need for additional tools

Ø145-210MM CUT-OUT SIZES

Available in 6" and 8",
these downlights are designed
to fit existing holes

LOW GLARE UGR<19 RATED DIFFUSER

Reduce headaches and
improve focus

3H EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and
reduce electricity consumption

Dimmable options only

