


KINGSTON DOWNLIGHT UGR<19 4000K 8" 35W STANDARD

NET-60-05-26



Features & Benefits

- Low glare diffuser with UGR<19
- Ø190-210mm cut out size
- Single colour temperature 4000K

Key Data

| | |
|--------------------|---------------------------------|
| Power | 35W |
| Luminous Flux | 3180lm |
| Colour Temperature | 4000K |
| IP Rating | IP20 |
| Dimensions | Ø218 x 106 x 98mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-50-12-08 | Manual/Self Test Emergency Selectable LED Converter 2.5W |
| NET-61-33-03 | DALI Emergency Kit 3W |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|--------------------------|
| Input Voltage (AC) | 220-240V AC |
| Power Factor | 0.95 |
| Luminaire Efficacy | 107lm/w |
| LED Manufacturer | Tridonic |
| No. of LEDs | 60 |
| Driver Manufacturer | Tridonic Advanced Series |
| Driver Output Voltage (DC) | 37.5V |
| Total Circuit Power (w) | 30W |
| Electrical Class | 2 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 60° |
| Dimmable | No |
| Flicker-Free | Yes |
| Operating Temp. | -15°C to +40°C |
| Lifespan LM80 | 50,000 Hours |
| UGR Rating | Less than 19 |
| Weight | 0.252Kg |
| Manufacturer | Tridonic |
| Cut-Out Size | ø190-210mm |
| Housing Colour | White |
| Housing Material | Aluminium |

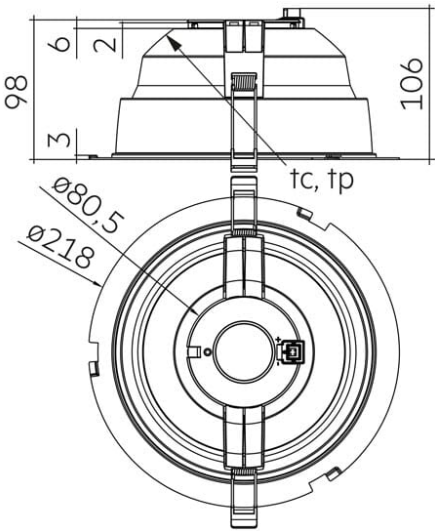

Other Options

| Description | |
|--------------|--|
| NET-60-05-26 | Kingston Downlight UGR<19 4000K 8" 35W Standard |
| NET-60-05-27 | Kingston Downlight UGR<19 4000K 8" 35W Emergency |
| NET-60-05-28 | Kingston Downlight UGR<19 4000K 8" 35W Dimmable one4all |
| NET-60-05-29 | Kingston Downlight UGR<19 4000K 8" 35W Dimmable Emergency |
| NET-60-05-30 | Kingston Downlight UGR<19 4000K 8" 35W Dimmable DALI Emergency |

NET LED Lighting
Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

STAINLESS STEEL RETAINING CLIPS

Quick and simple installation
with no need for additional tools

Ø145-210MM CUT-OUT SIZES

Available in 6" and 8",
these downlights are designed
to fit existing holes

LOW GLARE UGR<19 RATED DIFFUSER

Reduce headaches and
improve focus

3H EMERGENCY OPERATION

Ensures the fitting comes on in
the event of a power failure

Emergency options only

TRIDONIC DIMMABLE DRIVER

Customise lighting levels and
reduce electricity consumption

Dimmable options only

