

## KINGSTON DOWNLIGHT UGR<19 4000K 8" 35W DIMMABLE ONE4ALL

NET-60-05-28



DIM



### Features & Benefits

- Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)
- Low glare diffuser with UGR<19
- Ø190-210mm cut out size
- Single colour temperature 4000K

### Key Data

Power	35W
Luminous Flux	3180lm
Colour Temperature	4000K
IP Rating	IP20
Dimensions	Ø218 x 106 x 98mm
Warranty	5 Years (Registration Required)

### Compatible Accessories

NET-50-12-08	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-03	DALI Emergency Kit 3W

#### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V AC
Power Factor	0.95
Luminaire Efficacy	107lm/W
LED Manufacturer	Tridonic
No. of LEDs	60
Driver Manufacturer	Tridonic Premium Series
Driver Output Voltage (DC)	37.5V
Total Circuit Power (W)	30W
Electrical Class	2
Colour Rendering	>80 CRI
Lamp Viewing Angle	60°
Dimmable	Yes
Flicker-Free	Yes
Operating Temp.	-15°C to +40°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 19
Weight	0.252Kg
Manufacturer	Tridonic
Cut-Out Size	ø190-210mm
Housing Colour	White
Housing Material	Aluminium
Dimming Input Type	Tridonic one4all Dimming - DALI 1 & 2 and switchDIM (Push)

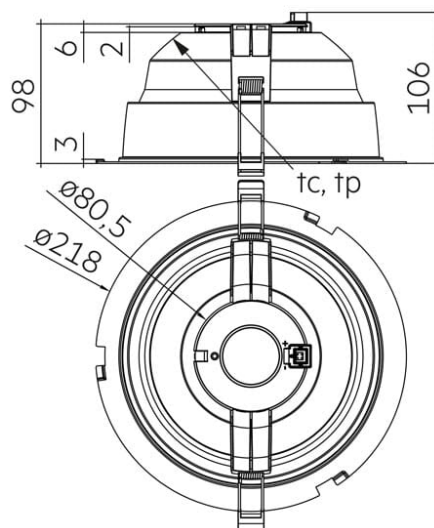

## Other Options

Description	
NET-60-05-26	Kingston Downlight UGR<19 4000K 8" 35W Standard
NET-60-05-27	Kingston Downlight UGR<19 4000K 8" 35W Emergency
NET-60-05-28	Kingston Downlight UGR<19 4000K 8" 35W Dimmable one4all
NET-60-05-29	Kingston Downlight UGR<19 4000K 8" 35W Dimmable Emergency
NET-60-05-30	Kingston Downlight UGR<19 4000K 8" 35W Dimmable DALI Emergency

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)

## STAINLESS STEEL RETAINING CLIPS

Quick and simple installation  
with no need for additional tools

## Ø145-210MM CUT-OUT SIZES

Available in 6" and 8",  
these downlights are designed  
to fit existing holes

## LOW GLARE UGR<19 RATED DIFFUSER

Reduce headaches and  
improve focus

## 3H EMERGENCY OPERATION

Ensures the fitting comes on in  
the event of a power failure

*Emergency options only*

## TRIDONIC DIMMABLE DRIVER

Customise lighting levels and  
reduce electricity consumption

*Dimmable options only*

