

TRIDONIC BLUETOOTH DIMMABLE DRIVER 1200MA (1200X600MM PANELS)

NET-60-16-30



**Key Data**

<b>Power</b>	45W
<b>IP Rating</b>	IP20
<b>Dimensions</b>	215 x 70 x 31mm
<b>Warranty</b>	3 Years

**NET LED Lighting**

Buckingway Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Operating Temp.	-25°C to +50°C
Weight	0.231Kg
Manufacturer	Tridonic
Output Current	1200mA
Power Frequency	0/50/60Hz
Housing Colour	White
Housing Material	Polycarbonate
Dimming Input Type	DALI 1 & 2, DSI and SwitchDIM (Push)

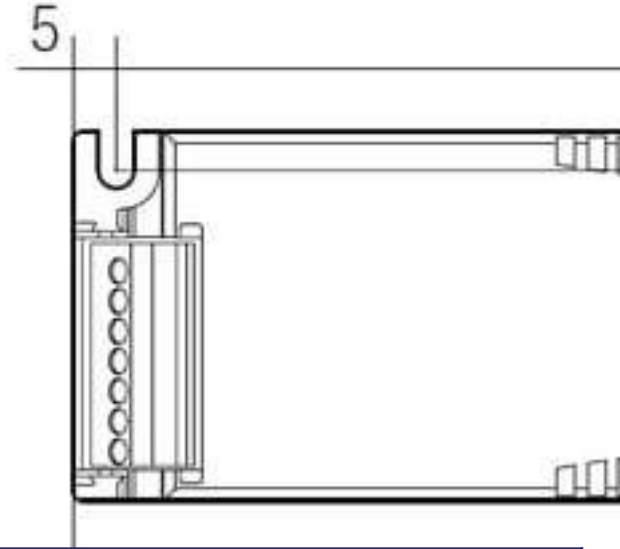

## Other Options

Description	
NET-60-16-60	Tridonic Bluetooth Dimmable Driver 350mA (6" Caxton Downlights)
NET-60-16-70	Tridonic Bluetooth Dimmable Driver 500mA (8" Caxton Downlights and 500x500mm Panels)
NET-60-16-20	Tridonic Bluetooth Dimmable Driver 800mA (600x600mm and 1200x300mm Panels)
NET-60-16-30	Tridonic Bluetooth Dimmable Driver 1200mA (1200x600mm Panels)

## NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**

FOR NEXT DAY DELIVERY

T: 01223 851505 | [sales@netled.co.uk](mailto:sales@netled.co.uk) | [www.netled.co.uk](http://www.netled.co.uk)