

KEYSTON FLOOD LIGHT TRI-COLOUR 20W

NET-70-04-20



Features & Benefits

- Selectable 3000K, 4000K or 5000K colour temperature
- IP65 and IK08 rated housing
- Optional plug-in PIR Motion or Photocell Sensors

Key Data

Power	20W
Luminous Flux	1900lm
Colour Temperature	3000K/4000K/5000K
IP Rating	IP65
IK Rating	IK08
Dimensions	232 x 109 x 46mm
Warranty	3 Years

Compatible Accessories

NET-42-04-39	2-in-1 Motion and Photocell Sensor
NET-15-04-49	Photocell Sensor

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	200-240V
Power Factor	>0.9
Luminaire Efficacy	100lm/w
LED Manufacturer	Epistar
LED Type	SMD 2835
Driver Manufacturer	EVB
Driver Output Voltage (DC)	Built-in Driver
Total Circuit Power (w)	20W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°*90°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	<29
Weight	0.65Kg
Manufacturer	Everbright Lighting Co., Ltd.
Fire Rating	V0
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Glass

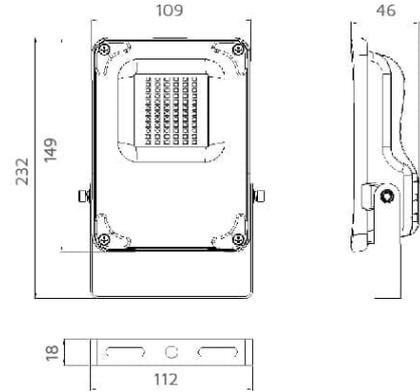

All units are in mm

Other Options

Description	
NET-70-04-20	Keyston Flood Light Tri-Colour 20W
NET-70-04-30	Keyston Flood Light Tri-Colour 30W


NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

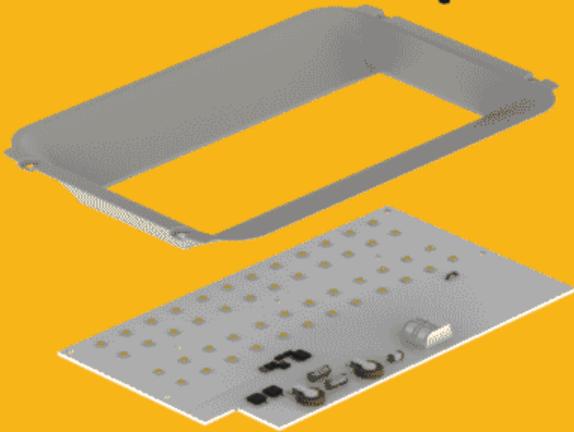

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5000K

IK08 AND IP65 RATED HOUSING

Protect your flood light from water, dust and impact

OPTIONAL EASY-TO-USE PLUG'N'PLAY SENSORS

Choose between PIR Motion, Photocell or our 2-in-1 Motion and Photocell Sensor!