

KEYSTON FLOOD LIGHT TRI-COLOUR 30W

NET-70-04-30



Features & Benefits

- Selectable 3000K, 4000K or 5000K colour temperature
- IP65 and IK08 rated housing
- Optional plug-in PIR Motion or Photocell Sensors

Key Data

Power	30W
Luminous Flux	2500lm
Colour Temperature	3000K/4000K/5000K
IP Rating	IP65
IK Rating	IK08
Dimensions	282 x 155 x 50mm
Warranty	3 Years

Compatible Accessories

NET-42-04-39	2-in-1 Motion and Photocell Sensor for Ramsey Marine Grade Flood Lights
NET-15-04-49	Photocell Sensor

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	200-240V
Power Factor	>0.9
Luminaire Efficacy	100lm/w
LED Manufacturer	Epistar
LED Type	SMD 2835
Driver Manufacturer	EVB
Driver Output Voltage (DC)	Built-in Driver
Total Circuit Power (W)	30W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°*90°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	<29
Weight	1.1Kg
Manufacturer	Everbright Lighting Co., Ltd.
Fire Rating	V0
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Glass

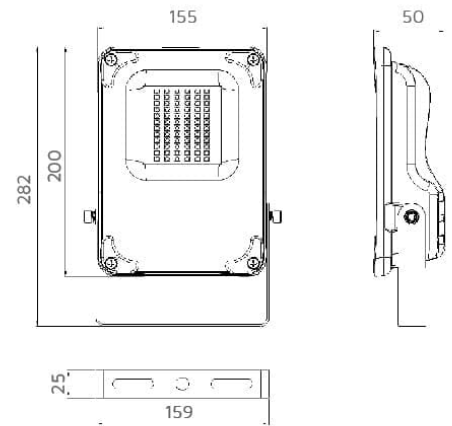

All units are in mm

Other Options

Description	
NET-70-04-20	Keyston Flood Light Tri-Colour 20W
NET-70-04-30	Keyston Flood Light Tri-Colour 30W

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

3K

4K

5K

SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature
3000K, 4000K or 5000K

IK08 AND IP65 RATED HOUSING

Protect your flood light from
water, dust and impact

OPTIONAL EASY-TO-USE PLUG'N'PLAY SENSORS

Choose between PIR Motion,
Photocell or our 2-in-1 Motion and
Photocell Sensor!

