

Semi-recessed for discreet look



Baffled for low glare and visual comfort

CRI 90 providing true colour appearance

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Available with a choice of a matt black or matt white finish

A sleek cylindrical style with hidden fixings

Complete with 1.5m adjustable fabric cable

7 year warranty: Collingwood's signature quality you can trust



1901 PENDANT

Sleek, low glare, pendant

FEATURES


IP rating	IP44
CSP Switchable	Single CCT
Tiltable (°)	Fixed
UGR	UGR<16
Dimmable Option	Yes (1-10V)
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>90
Colour Consistency	SDCM3
Emergency Option	Yes
Rotation angle (°)	Fixed
Pendant Cable Length	1,500 mm


INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	450g
Insulation Coverable	No
Inrush Current	10A/220ms
Cut Out Size	65-68
Construction Material	Aluminium
UK Bathroom Zone	1
Maximum ceiling thickness	40 mm
SELV	Yes
Electric Class (1, 2, 3)	II
Suitable for coastal areas	No
Install Connector Type	Loop in / Loop out
UK Building Regulations	Part P, L, C & E
FR Building Regulations	Satisfait les essais au fil incandescent: 650°C
Mounting Options	Suspended
Power Factor	0.80

PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
BPL15F27NM	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	15°	800	89	7214	
BPL15F27ND	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	15°	800	89	7214	
BPL15F27NV	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	15°	800	89	7214	
BPL15F27MM	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	24°	800	89	3250	
BPL15F27MD	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	24°	800	89	3250	
BPL15F27MV	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	24°	800	89	3250	
BPL15F27WM	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	50°	800	89	1300	
BPL15F27WD	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	50°	800	89	1300	
BPL15F27WV	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	2700K	50°	800	89	1300	

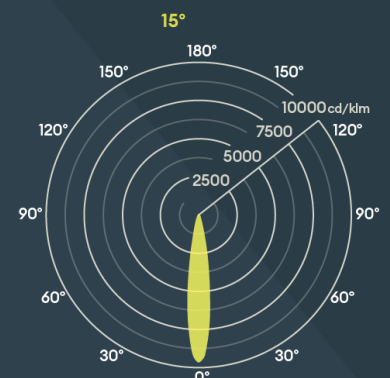

BPL15F30NM	Matt white RAL9003	Pendant Black Baffle Semi- Recessed	9.0W	3000K	15°	800	89	7816	
-------------------	-----------------------	---	------	-------	-----	-----	----	------	---

LIGHTING INNOVATION

WIRING INFORMATION

Cable / Flying Lead	2 x twin & earth (6242Y 3x1.5mm) or 3-core cable (R02V 3x1.5mm)
Cable Required for Connector	2 x twin & earth (6242Y 3x1.5mm) or 3-core cable (R02V 3x1.5mm)
Type of Wiring Required	Parallel

ACCESSORIES

LEDEP10	3hr non-maintained emergency pack (plug & play)	Sold Separately
BDLFH2	Fire Hood	Sold Separately

More than a century of design and innovation helped inspire the creation of the luxurious architectural 1901 range, for when only the best will do. 1901 is both contemporary and classic, with a focus on premium fittings, a high-quality performance and easy integration into control systems. Perfect for luxury residential and hospitality projects, 1901 showcases an aesthetically simple, low-glare luminaire design, with market-leading technical performance. The detailed fittings come in a variety of stylish options including a choice of bezels, adjustability, colour temperatures, beam angles, dimming methods, and IP ratings to perfectly complete the look of any interior design project. Simply configure your product to find the relevant product code. The range is engineered to be as easy to use as possible and can fit seamlessly into the installation and commissioning stages of a lighting project.