



Colour switchable between 2700K 3000K and 4000K



IP20 for use internally



CRI > 90 providing true colour appearance

WARRANTY

Warranty


5 years

FEATURES & BENEFITS

A medium beam angle of 38° for a more focused light

Long lifetime of 50,000hrs

For use with 3 Circuit Track

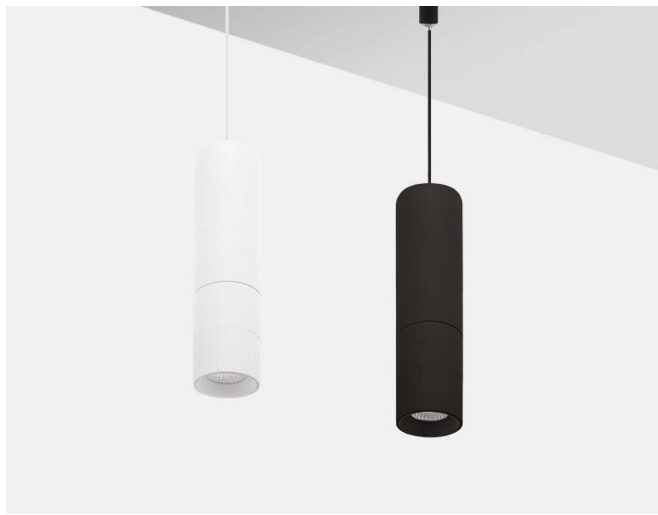

AUREA 3 TP

Pendant light for accent lighting

FEATURES

IP rating	IP20
CSP Switchable	Switchable CCT
Tilttable (°)	Fixed
Dimmable Option	Yes
LED Lifetime	L80 50,000h
Colour Rendering Index	CRI>90
Colour Consistency	SDCM3
Rotation angle (°)	Fixed

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 45°C
Weight	620g
Inrush Current	1.6A 37ms
Construction Material	Aluminium
Electric Class (1, 2, 3)	I
Suitable for coastal areas	No
UK Building Regulations	Part P & L
Mounting Options	On Track

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
TR43405	White	6W	2700K / 3000K / 4000K	38°	500-550	83-92	
TR43430	Black	6W	2700K / 3000K / 4000K	38°	500-550	83-92	

WIRING INFORMATION

Cable Required for Connector	N/A
Type of Wiring Required	Parallel

ACCESSORIES

C051710	3-Circuit Aurea Pendant Champagne Sleeve Cover	Sold Separately
C051777	3-Circuit Aurea Pendant Rose Sleeve Cover	Sold Separately
	Track range and accessories	Sold Separately

