




LiFePO4 Battery



Battery Temperature Monitored



Manual and Self-Test combined

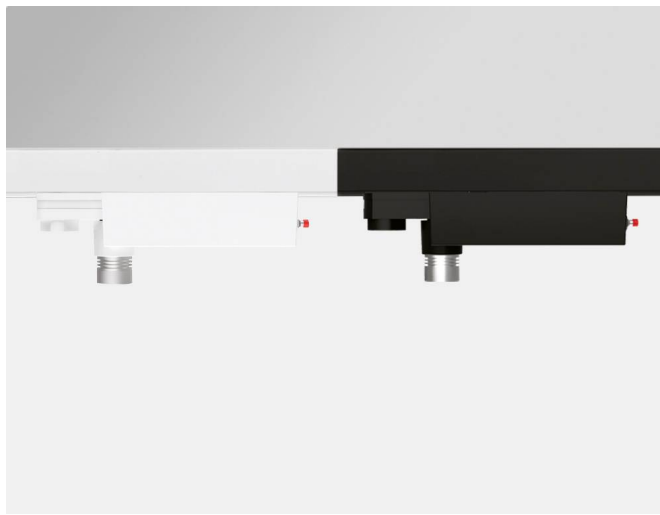

3 Circuit Track

SALVUS ROUTE

360lm 3C Track Anti-panic

FEATURES


IP rating	IP20
IK rating	IK06
CSP Switchable	Single CCT
LED Lifetime	L70 50,000h
Emergency Option	Yes, Manual & Self-Test
Maintained / Non-Maintained	Non-Maintained

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C-40°C
Weight	EMR3CBMS: 370g, EMR3CWMS:370g
Inrush Current	EMR3CWMS:TBC, EMR3CBMS: TBC
Construction Material	PC Housing
Electric Class (1, 2, 3)	II
Battery	EMR3CBMS: TBC, EMR3CWMS:TBS
Mounting Options	On Track


PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	EM lm
EMR3CBMS	Black	3W	5700K	60°	360	360
EMR3CWMS	White	3W	5700K	60°	360	360

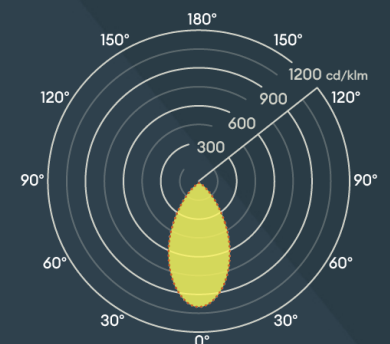

224mm

67mm



102.5mm