

**IP20** IP20 perfect for internal applications

**DIM** DALI dimmable option available

**CRI>80** CRI 80 providing true colour appearance

## WARRANTY


Warranty

5 years

## FEATURES & BENEFITS

Recessed ceiling mounting only

Quick and easy installation with springs

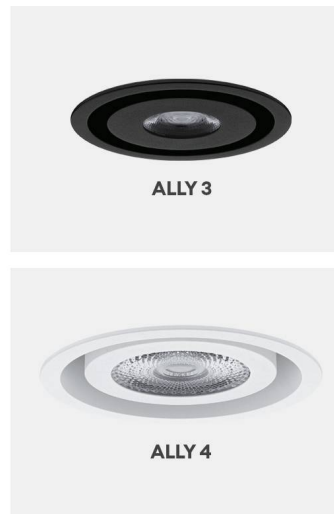

## ALLY 3 RDX

Adjustable round recessed spotlight

### FEATURES

|                                |                |
|--------------------------------|----------------|
| IP rating                      | IP20           |
| IK rating                      | IK02           |
| CSP Switchable                 | Single CCT     |
| Tiltable                       | 45°            |
| UGR                            | UGR<19         |
| Dimmable Option                | Yes            |
| LED Lifetime                   | L80 50,000h    |
| Colour Rendering Index         | CRI>90         |
| Colour Consistency             | SDCM3          |
| Emergency Option               | No             |
| Rotation Angle                 | 355°           |
| LED Photobiological Risk Group | RG1 - Low Risk |

### INSTALLATION INFORMATION

|                             |              |
|-----------------------------|--------------|
| Input                       | 220-240V AC  |
| Maximum Ambient Temperature | -30°C - 50°C |
| Weight                      | 0.354        |
| Insulation Coverable        | No           |
| Inrush Current              | N/A          |
| Cut Out Size                | 105          |
| Construction Material       | Aluminium    |
| UK Bathroom Zone            | N/A          |
| SELV                        | Yes          |
| Electric Class (1, 2, 3)    | 2            |
| Suitable for coastal areas  | No           |
| Mounting Options            | Recessed     |
| Part B Fire Rating          | No           |

### PHOTOMETRICS @ 25°C

| Product code | Finish | W   | Colour | Beam | lm   | lm/W | Energy  |
|--------------|--------|-----|--------|------|------|------|---------|
| DO529WW05    | Black  | 10W | 3000K  | 38°  | 1025 | 72   | A t G E |
| DO529WW30    | White  | 10W | 3000K  | 38°  | 1025 | 72   | A t G E |

### WIRING INFORMATION

|                         |                        |
|-------------------------|------------------------|
| Cable / Flying Lead     | 0.5-1.5mm <sup>2</sup> |
| Type of Wiring Required | Parallel               |

### LED DRIVER

| Driver                  | Input    | SELV | Dimming | Bathroom Zone |
|-------------------------|----------|------|---------|---------------|
| N/A (integrated driver) | 220-240V | Yes  | Yes     | N/A           |

### ACCESSORIES

|       |  |                 |
|-------|--|-----------------|
| CD123 | Dimmable DALI constant current converter | Sold Separately |
|-------|--|-----------------|

