

IP20 IP20 perfect for internal applications

DIM DALI dimmable option available

CRI>80 CRI 80 providing true colour appearance


WARRANTY

Warranty 5 years

FEATURES & BENEFITS

Recessed ceiling mounting only

Quick and easy installation with springs

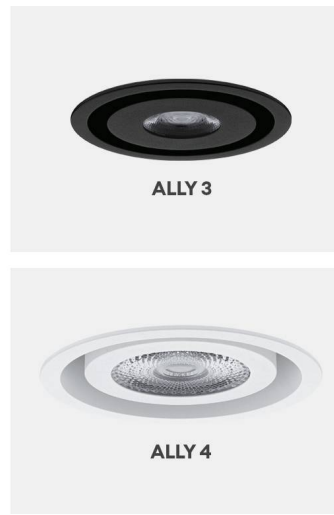

ALLY 3 RDX

Adjustable round recessed spotlight

FEATURES

| | |
|------------------------|-------------|
| IP rating | IP20 |
| IK rating | IK02 |
| CSP Switchable | Single CCT |
| Tilttable (°) | 45 |
| UGR | UGR<19 |
| Dimmable Option | Yes |
| LED Lifetime | L80 50,000h |
| Colour Rendering Index | CRI>90 |
| Colour Consistency | SDCM3 |
| Emergency Option | No |
| Rotation angle (°) | 355 |

INSTALLATION INFORMATION

| | |
|-----------------------------|--------------|
| Input | 220-240V AC |
| Maximum Ambient Temperature | -30°C - 50°C |
| Weight | 0.354 |
| Insulation Coverable | No |
| Inrush Current | N/A |
| Cut Out Size | 105 |
| Construction Material | Aluminium |
| UK Bathroom Zone | N/A |
| SELV | Yes |
| Electric Class (1, 2, 3) | II |
| Suitable for coastal areas | No |
| Mounting Options | Recessed |
| Part B Fire Rating | No |

PHOTOMETRICS @ 25°C

| Product code | Finish | W | Colour | Beam | lm | lm/W | Energy |
|--------------|--------|-----|--------|------|------|------|---------|
| DO529WW05 | Black | 10W | 3000K | 38° | 1025 | 72 | A t G E |
| DO529WW30 | White | 10W | 3000K | 38° | 1025 | 72 | A t G E |

WIRING INFORMATION

| | |
|-------------------------|------------------------|
| Cable / Flying Lead | 0.5-1.5mm ² |
| Type of Wiring Required | Parallel |

LED DRIVER

| Driver | Input | SELV | Dimming | Bathroom Zone |
|--------------------------|----------|------|---------|---------------|
| N/A (intergrated driver) | 220-240V | Yes | Yes | N/A |

ACCESSORIES

| | | |
|-------|--|-----------------|
| CD123 | Dimmable DALI constant current converter | Sold Separately |
|-------|--|-----------------|

