



CCT switchable between 3000K, 4000K & 5000K



Up to 165lm/W efficacy



Integral photocell as standard

ARC WALLPACK

Wallpack suitable for 3m (10W) or 4m (17W) mounting height

FEATURES

IP rating	IP66
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	PC Dusk to Dawn
Dimmable Option	No
LED Lifetime	L70 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	Yes, Manual-Test
Walk Over / Drive Over	No

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-30°C - 50°C
Weight	2.7kg
Inrush Current	16A 0.2ms
Construction Material	ADC12 Aluminium alloy, uv-resistant polycarbonate lens, stainless steel 304 screws
UK Bathroom Zone	2
Electric Class (1, 2, 3)	I
Earth Leakage	N/A
Suitable for coastal areas	No
Install Connector Type	Push-fit terminal, loop-in/loop-out
Mounting Options	Wall
Power Factor	0.95

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Ix@1m	EM lm	Energy
ARA1N	Anthracite grey RAL7016	Standard	98°114°	10W	3000K	1550	155	445	-	
					4000K	1650	165	474	-	
					5000K	1600	160	459	-	
ARA1NE	Anthracite grey RAL7016	Emergency	98°114°	10W	3000K	1550	155	445	300	
					4000K	1650	165	474	300	
					5000K	1600	160	459	300	
ARA2N	Anthracite grey RAL7016	Standard	98°114°	17W	3000K	2600	153	746	-	
					4000K	2750	162	789	-	
					5000K	2700	159	775	-	
ARA2NE	Anthracite grey RAL7016	Emergency	98°114°	17W	3000K	2600	153	746	300	
					4000K	2750	162	789	300	
					5000K	2700	159	775	300	

WIRING INFORMATION

Cable / Flying Lead	No flying leads are required; a loop-in, loop-out terminal is supplied.
Type of Wiring Required	Parallel

ACCESSORIES

AREMGKIT	Arc Emergency Spare Kit	Sold Separately
-----------------	-------------------------	-----------------

WARRANTY

Warranty

5 years

FEATURES & BENEFITS

Designed to illuminate a pathway efficiently and safely, whilst preserving the habitat

Highly energy efficient with up to 165 luminaire lumens per watt for low total cost over luminaire's lifetime

Anti-glare optical control designed to reduce upward sky glow


Set to 3000K as standard (CCT switchable) to minimise low blue light content

Integral photocell to switch the light ON at dusk and OFF at dawn

Slim 97mm profile integrates discreetly to the building architecture

Removeable backplate to aid fast installation

Part of the 'Collingwood in colour' collection anthracite family.

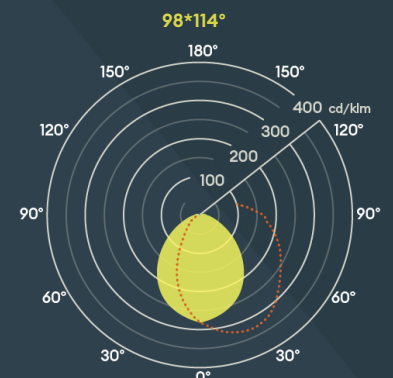

293mm

97mm

289mm

