



SLIM CSP BOLLARD

CCT Switchable IP65 Bollard

FEATURES

IP rating	IP65
IK rating	IK08
CSP Switchable	Switchable CCT
UGR	UGR<19
Sensor Option	No
Dimmable Option	Yes (TRIAC)
LED Lifetime	L80 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	No
RAL Colour	9005

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-15°C - 30°C
Weight	BSL_3: 1060g, BLS_6: 1380g
Inrush Current	10A 0.4ms
Construction Material	Aluminum
UK Bathroom Zone	N/A
SELV	No
Electric Class (1, 2, 3)	I
Earth Leakage	0.032
Suitable for coastal areas	Yes
UK Building Regulations	Part P & L
Mounting Options	Surface
Power Factor	0.95

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
BLSAG3RDCS	Anthracite	300mm	120°	14W	2700K	720	56	A↑G C
					3000K	770	62	
					4000K	800	58	
BLSBK3RDCS	Black	300mm	120°	14W	2700K	630	50	A↑G C
					3000K	660	53	
					4000K	680	50	
BLSCN3RDCS	Corten	300mm	120°	14W	2700K	760	57	A↑G C
					3000K	735	60	
					4000K	675	55	
BLSAG6RDCS	Anthracite	600mm	120°	14W	2700K	720	56	A↑G C
					3000K	770	62	
					4000K	800	58	
BLSBK6RDCS	Black	600mm	120°	14W	2700K	630	50	A↑G C
					3000K	660	53	
					4000K	680	50	
BLSCN6RDCS	Corten	600mm	120°	14W	2700K	760	57	A↑G C
					3000K	735	60	
					4000K	675	55	

Default Settings: 3000K colour temperature, 24W power consumption. Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	H05RN-F 3G 1.0mm2
Cable Required for Connector	3x 0.75 - 2.5mm²
Type of Wiring Required	Parallel

ACCESSORIES

COLLINGWOOD LIGHTING

LIGHTING INNOVATION

- Switchable between 2700K, 3000K and 4000K
- 360° even light distribution
- IP65 ideal for car parks and walk ways


WARRANTY


Warranty	5 years

FEATURES & BENEFITS

- Choice of colours Black, Anthracite and Corten
- Available in 300mm and 600mm sizes
- Cable entry through base and expansion bolt installation kit included
- IP68 inline connector included
- Anthracite RAL 7016, Black RAL 9005

BEAM ANGLE: **120°**

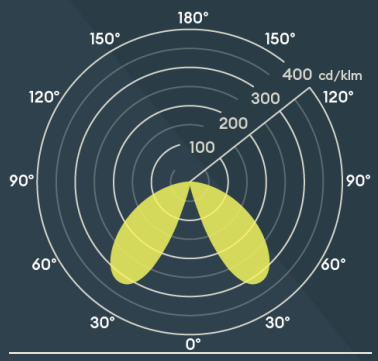



SBEBX4	Root mount Kit, J-Bolts X4	Sold Separately

COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

Slim Bollard is a stylish and long-lasting lighting solution for your outdoor space, available in 300mm and 600mm sizes and Black, Grey, or Corten finishes to match your decor. It's simple to install, with cable entry through the base, an expansion bolt kit, and an IP68 inline connector. The Slim Bollard, with its IP65 weatherproof rating, is ideal for car parks, walkways, and other outdoor environments. It features advanced CSP technology for superior light output, CCT switch capability (2700K, 3000K, 4000K) for adjustable ambiance, and a uniform 360° lighting distribution.