

23W 23W

IP65 IP65 ideal for car parks and walk ways

360° Benefiting from light all round with a 360° beam angle

WARRANTY

Warranty 5 years

FEATURES & BENEFITS


Straight to mains screw terminals

Comes complete with root mounting kit

Low glare illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces

High lumen output of 930lm

Black RAL 9011

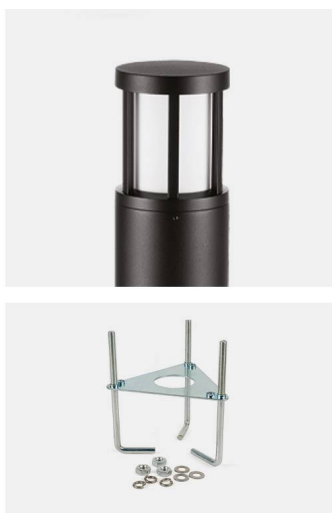

BOL201 BOLLARD

Straight to mains, IP65, 930lm bollard

FEATURES

IP rating	IP65
IK rating	IK04
CSP Switchable	Single CCT
Sensor Option	No
Dimmable Option	No
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	No

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	4.4Kg
Inrush Current	20A 0.5ms
Construction Material	Aluminium / PVC
UK Bathroom Zone	2
SELV	Yes
Electric Class (1, 2, 3)	I
Earth Leakage	0.2
Suitable for coastal areas	No
UK Building Regulations	N/A

PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
BOL201X30	Black RAL9011	900mm	23W	3000K	360°	930	40	108	

WIRING INFORMATION

Cable Required for Connector	3x 1.0mm ²
Type of Wiring Required	Parallel

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (integrated SELV driver)	220-240V	Yes	No	2

ACCESSORIES

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	--	-----------------

Ø145mm

